

VESSEL

Think Solutions!

The Game

Changer

e-ASSIST
ELECTRIC & MANUAL



JIS DRIVE
FOR ALL SCREWS

Premium Japanese Accessories



JIS DRIVE+ FOR ALL SCREWS




What is JIS DRIVE?

JIS means Japanese Industrial Standards. This standard is applied for Japanese Standards screws, and is mainly used in Japanese-made cars, motorcycles, home appliances, etc.

The tips of VESSEL screwdrivers and bits are manufactured in accordance with JIS.


In addition, VESSEL has developed its own in-house standards to achieve even higher precision and quality tips.

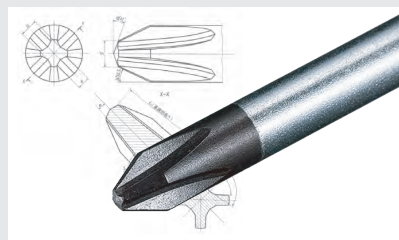

Why FOR ALL SCREWS?

As shown in the picture, VESSEL JISDRIVE was developed with the concept that *the 4 sides of the tip (shown as blue) should fit the screw evenly, allowing you to turn screws with confidence.*

As a result, VESSEL tips can fit any standard screws and transmit force without loss of power.

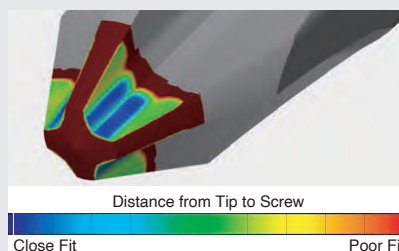


This is the Key Point!

Point A (blue area in the picture) is the common dimension in all standards, in JIS, ASME, ANSI and DIN.

In addition to that, in screw manufacturing, Point A is known as the most stable and accurate point of contact with the fewest deformation points.

VESSEL JISDRIVE is designed to fit all screws around the world by closely matching with the point A region of screws.

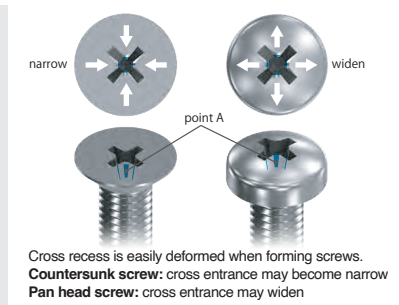

This is the Key Point!

Company A:

The tip contacts at the bottom of screw hole, and the driver becomes wobbly.

Company B:


The tip contacts near the entrance of the screw hole. It appears to fit well, but it actually doesn't. This can damage the screw hole.


- > Both may not fit depending on the standard or screws, and can cause breakage or cam-out.

VESSEL JISDRIVE:

The tip fits extremely well, and there is a space between the tip and screw.

- > Thereby, the blue part (all 4 sides of the tip) fits the screw evenly, allowing you to turn screws with confidence.

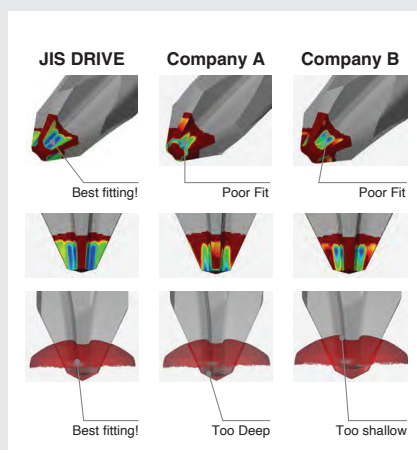

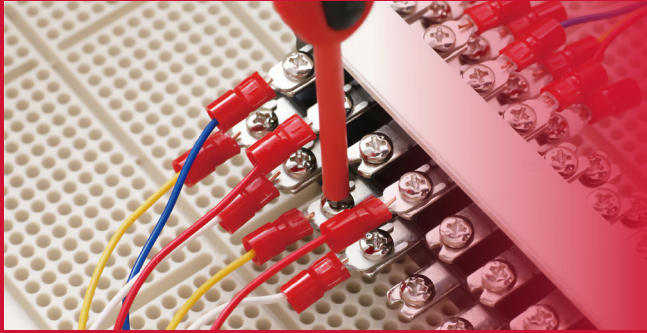

pg. 3-15

Construction Bits



pg. 16-35

Hand Tools



pg. 23-24

Bundle Package



pg. 36-38

Saw Blade

GS "GOSAI" Bits

ORIGINAL EXTRA SUPERALLOY MAKES THE BITS STRONG AND TOUGH.

Our original new material, Extra Superalloy, is a special alloy that adds stronger and more flexible properties to bits. Extra Superalloy bits are hard, tough, and resistant to breakage.



GS14

Double End "GOSAI" bits

Different colors applied to each size.


Max hardness: 62HRC

EXTRA SUPERALLOY


*Extra Superalloy is used for items and sizes in which material properties can be fully utilized.

"GOSAI" BIT is not only resistant to breakage or bending, but also transmits torque accurately and reliably, allowing screws to be tightened securely.

Comparison test with twisting tester

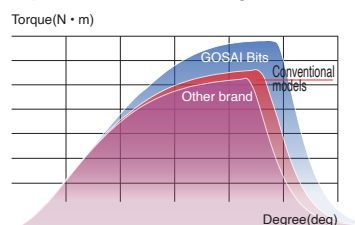

Screw Tightening Test

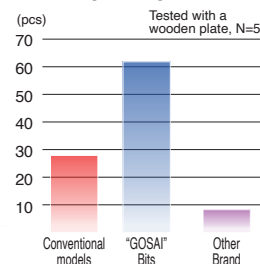

Precise tip-end machining. High quality fitting. As the tip-end is not plated or painted, the cross shaped tip-end can fit various screws.

Tip-end 3D comparison (+0)

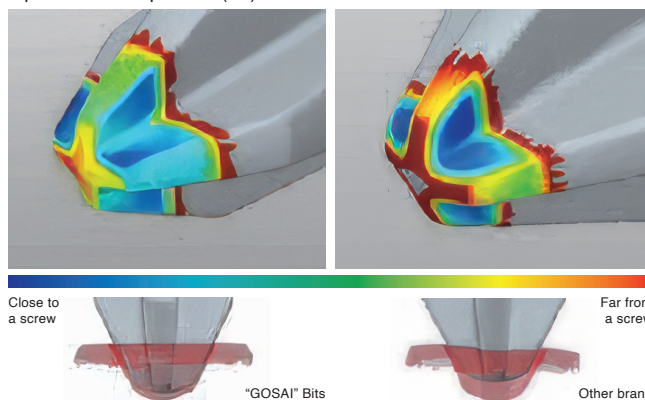


*Image is for illustration purposes.


GS14 Double End "GOSAI" Bit



- Different colors applied to each size.
- Strong and tough Extra Superalloy adopted.

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485506	GS142065	⊕2 × 65 2pcs.	160×35×8	336064	14.00
485508	GS142110	⊕2 × 110 2pcs.	160×35×8	336088	18.00
485509	GS142130	⊕2 × 130 2pcs.	180×35×8	336095	25.00
485510	GS142150	⊕2 × 150 2pcs.	180×35×8	336101	30.00
485511	GS142200	⊕2 × 200 1pc.	230×35×8	336118	20.00
485512	GS142300	⊕2 × 300 1pc.	340×35×8	336125	50.00
485513	GS142500	⊕2 × 500 1pc.	540×35×8	336132	118.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets

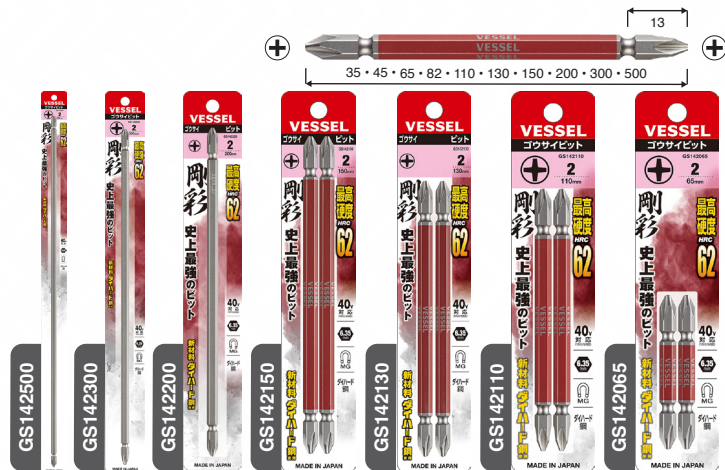

GS5P Double End "GOSAI" Bit 5-pc set



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485552	GS5P2065	⊕2 × 65 5pcs.	160×70×8	336521	34.00
485554	GS5P2110	⊕2 × 110 5pcs.	160×70×8	336545	42.00
485555	GS5P2130	⊕2 × 130 5pcs.	180×70×8	336552	58.00
485556	GS5P2150	⊕2 × 150 5pcs.	180×70×8	336569	68.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets



GS5P Assorted "GOSAI" Bit 5-pc set **NEW**



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485563	GS5P-01	Double End ⊕2/⊕6 × 65	160×70×8	336637	34.00
		Double End ⊕2 × 110			
		Double End ⊕3 × 65			
		Thin Shank ⊕1 × 65			
		Thin Shank ⊕2 × 100			



GSPZ Double End Posidriv "GOSAI" Bit **NEW**



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485564	GSPZ1110	PZ1×110 1pc.	160×35×8	336644	16.00
485565	GSPZ2110	PZ2×110 1pc.	160×35×8	336651	16.00
485566	GSPZ3110	PZ3×110 1pc.	160×35×8	336668	16.00




GS10P Double End "GOSAI" Bit 10-pc set



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485638	GS10P2065F	⌀2 × 65 10pcs.	140×87×7	027863	58.00
485639	GS10P2110F	⌀2 × 110 10pcs.	160×87×7	027870	76.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets

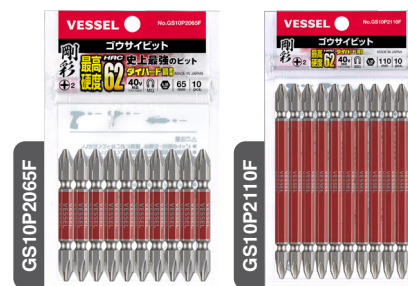

GS10P-01 "GOSAI" Bit Belt 10-pc set

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485644	GS10P-01	Single End ⌀1 × 100	1pc.	031495	82.00
		Single End ⌀2 × 100	1pc.		
		Double End ⌀1 × 65	1pc.		
		Double End ⌀2 × 45	2pcs.		
		Double End ⌀2 × 65	2pcs.		
		Double End ⌀2 × 110	1pc.		
		Double End ⌀3 × 65	1pc.		
		Combi ⌀2/⌀6 × 65	1pc.		

*Comes with one bit holder
SPQ: 10 sets



GS16 Thin Shank "GOSAI" Bit **NEW**



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485538	GS162100	⌀2 × 100 2pcs.	160×35×8	336385	23.00
485540	GS162150	⌀2 × 150 2pcs.	180×35×8	336408	36.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets



GS5P Thin Shank "GOSAI" Bit 5-pc Set




Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485557	GS5P2065D	⌀2 × 65 5pcs.	160×70×8	336576	48.00
485558	GS5P2100D	⌀2 × 100 5pcs.	160×70×8	336583	58.00
485559	GS5P2130D	⌀2 × 130 5pcs.	180×70×8	336590	74.00
485560	GS5P2150D	⌀2 × 150 5pcs.	180×70×8	336606	92.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets



GSH HEX "GOSAI" Bit

- For hexagon socket head bolts and hexagon socket set screws.



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485567	GSH015S	H1.5 × 65 1pc.	135×35×8	336675	18.00
485568	GSH020S	H2 × 65 1pc.	135×35×8	336682	16.00
485569	GSH025S	H2.5 × 65 1pc.	135×35×8	336699	15.00
485570	GSH030S	H3 × 65 1pc.	135×35×8	336705	15.00
485571	GSH040S	H4 × 65 1pc.	135×35×8	336712	15.00
485572	GSH050S	H5 × 65 1pc.	135×35×8	336729	15.00
485573	GSH060S	H6 × 65 1pc.	135×35×8	336736	15.00
485574	GSH080S	H8 × 65 1pc.	135×35×10	336743	20.00
485575	GSH100S	H10 × 65 1pc.	135×35×22	336750	34.00
485576	GSH120S	H12 × 65 1pc.	135×35×22	336767	35.00
485577	GSH140S	H14 × 65 1pc.	135×35×22	336774	36.00
485578	GSH170S	H17 × 65 1pc.	135×35×22	336781	50.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets (GSH100S, GSH120S, GSH140S, GSH170S - SPQ: 5 sets)

GSH HEX "GOSAI" Bit (Long type)



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485580	GSH020L	H2 × 150 1pc.	180×35×8	336804	24.00
485581	GSH025L	H2.5 × 150 1pc.	180×35×8	336811	24.00
485582	GSH030L	H3 × 150 1pc.	180×35×8	336828	24.00
485583	GSH040L	H4 × 150 1pc.	180×35×8	336835	24.00
485584	GSH050L	H5 × 150 1pc.	180×35×8	336842	24.00
485585	GSH060L	H6 × 150 1pc.	180×35×8	336859	24.00
485586	GSH080L	H8 × 150 1pc.	180×35×8	336866	30.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets

GS5P Assorted HEX "GOSAI" Bit 5-pc Set



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485579	GS5P-31	H2.5 × 65 1pc.	160×70×8	336798	52.00
		H3 × 65 1pc.			
		H4 × 65 1pc.			
		H5 × 65 1pc.			
		H6 × 65 1pc.			
485587	GS5P-32	H2.5 × 150 1pc.	180×70×8	336873	90.00
		H3 × 150 1pc.			
		H4 × 150 1pc.			
		H5 × 150 1pc.			
		H6 × 150 1pc.			

*Colors inside the table indicate the bit color.
SPQ: 10 sets



GSVT TORX® "GOSAI" Bit



- For TORX® screws.
- Manufactured under the license of TORX.
Supports any TORX® screws.
- Supports tamper-proof screws (except T4 and T5).



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485603	GSVT04S	T4 × 65 1pc.	135×35×8	337030	25.00
485604	GSVT05S	T5 × 65 1pc.	135×35×8	337047	25.00
485605	GSVT06SH	T6H × 65 1pc.	135×35×8	337054	24.00
485606	GSVT08SH	T8H × 65 1pc.	135×35×8	337061	24.00
485607	GSVT10SH	T10H × 65 1pc.	135×35×8	337078	24.00
485608	GSVT15SH	T15H × 65 1pc.	135×35×8	337085	25.00
485609	GSVT20SH	T20H × 65 1pc.	135×35×8	337092	25.00
485610	GSVT25SH	T25H × 65 1pc.	135×35×8	337108	25.00
485611	GSVT27SH	T27H × 65 1pc.	135×35×8	337115	25.00
485612	GSVT30SH	T30H × 65 1pc.	135×35×8	337122	25.00
485613	GSVT40SH	T40H × 65 1pc.	135×35×8	337139	25.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets

GSVT TORX® "GOSAI" Bit (Long type)



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485615	GSVT10LH	T10H × 150 1pc.	180×35×8	337153	34.00
485616	GSVT15LH	T15H × 150 1pc.	180×35×8	337160	34.00
485617	GSVT20LH	T20H × 150 1pc.	180×35×8	337177	35.00
485618	GSVT25LH	T25H × 150 1pc.	180×35×8	337184	35.00
485619	GSVT27LH	T27H × 150 1pc.	180×35×8	337191	35.00
485620	GSVT30LH	T30H × 150 1pc.	180×35×8	337207	35.00
485621	GSVT40LH	T40H × 150 1pc.	180×35×8	337214	35.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets

TORX® is a registered trademark of Acument Intellectual Properties, LLC (USA).
VESSEL is an official licensee of Acument Intellectual Properties, LLC.

GS5P Assorted TORX® "GOSAI" Bit 5-pc Set



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485614	GS5P-33	T10H × 65 1pc.	160×70×8	337146	100.00
		T15H × 65 1pc.			
		T20H × 65 1pc.			
		T25H × 65 1pc.			
		T30H × 65 1pc.			
485622	GS5P-34	T10H × 150 1pc.	180×70×8	337221	134.00
		T15H × 150 1pc.			
		T20H × 150 1pc.			
		T25H × 150 1pc.			
		T30H × 150 1pc.			

*Colors inside the table indicate the bit color.
SPQ: 10 sets



GS5P Assorted Ball Point "GOSAI" Bit 5-pc Set



Except
H8

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485596	GS5P-35	H3 x 100 1pc.	160x70x15	336965	74.00
		H4 x 100 1pc.			
		H5 x 100 1pc.			
		H6 x 100 1pc.			
		H8 x 100 1pc.			
485602	GS5P-36	H3 x 150 1pc.	180x70x15	337023	116.00
		H4 x 150 1pc.			
		H5 x 150 1pc.			
		H6 x 150 1pc.			
		H8 x 150 1pc.			

*Colors inside the table indicate the bit color.
SPQ: 10 sets



GSC "GOSAI" Bit with Tube



Except
6

- Slim shank type, with tube, not damaging the terminal block.

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485701	GSC161100	⊕1 x 100 1pc.	160x35x8	015846	28.00
485702	GSC161150	⊕1 x 150 1pc.	180x35x8	015853	32.00
485703	GSC162100	⊕2 x 100 1pc.	160x35x8	015860	28.00
485704	GSC162150	⊕2 x 150 1pc.	180x35x8	015877	32.00
485706	GSC163100	⊕3 x 100 1pc.	160x35x8	015891	28.00
485707	GSC163150	⊕3 x 150 1pc.	180x35x8	015907	32.00
485708	GSC16PL60	⊖6 x 100 1pc.	160x35x8	015914	30.00

*Colors inside the table indicate the bit color.
SPQ: 10 sets


SST SAKISUBO Torsion Bit 2-pc Set



- Highly durable tapered bit combined with torsion effect.
- Cushion effect at the constricted part prevents cam-out, improving working efficiency.

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485322	SST142065	⊕2 x φ4 x 65 2pcs.	160x35x8	349682	22.00
485324	SST142110	⊕2 x φ4 x 110 2pcs.	160x35x8	349705	28.00
485325	SST142150	⊕2 x φ4 x 150 2pcs.	180x35x8	349712	40.00
485326	SST142200	⊕2 x φ4 x 200 2pcs.	260x35x8	349729	48.00

*SPQ: 10 sets

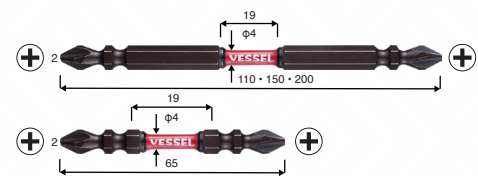

SST5P SAKISUBO Torsion Bit 5-pc Set



Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485444	SST5P2065	⊕2 x φ4 x 65 5pcs.	160x70x8	349736	48.00
485446	SST5P2110	⊕2 x φ4 x 110 5pcs.	160x70x8	349750	66.00

*SPQ: 10 sets

VESSEL


NMC Magnetic Catcher



- Magnetic catcher with two built-in neodymium magnets helps catch screws securely.
- Can perform continuous screw tightening in cramped and limited spaces or drywalling, in combination with a bit.

Code	Model	Set Content	Card Size (mm)	SPQ	Outer Ctn. (sets)	JAN (4907587)	RRP (RM)
486575	NMC-2P	Red 2-pc set	120x44x20	10	60	347251	40.00
486771	NMC-2PG	Green 2-pc set	120x44x20	10	60	015594	40.00
486772	NMC-2PY	Yellow 2-pc set	120x44x20	10	60	015600	40.00
486773	NMC-2PB	Blue 2-pc set	120x44x20	10	60	015617	40.00

*SPQ: 10 sets

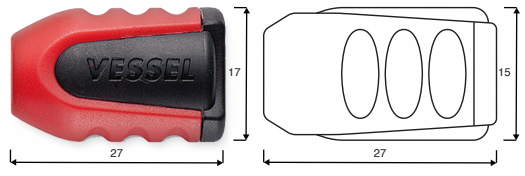

BH-41 Double-End Socket

- 1 socket compatible with multiple drill screws.
- Multi-function socket can also be used as an adapter for bit extension.

Code	Model	Socket A/F	φD (mm)	Socket OAL	Bit (Accessory)	Card Size (mm)	JAN (4907587)	RRP (RM)
486762	BH-41	8	10	18	60	⌀2 × 65	160x50	501332 90.00

*Metalworking drill: up to dia.6mm
 *Woodworking drill: up to dia.12mm
 *Socket bit cannot be linked.
 SPQ: 5pcs.
 Outer Ctn.: 50pcs.

Bit (accessory)



Double End Socket




PZ Double End Combi Bit 2-pc Set



- PZ2 and PZ3 are combined into one bit.

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485401	PZ142365	PZ2/ PZ3 × 65 2pcs.	160x35x8	347206	32.00
485402	PZ142311	PZ2/ PZ3 × 110 2pcs.	160x35x8	347084	36.00

SPQ: 10 sets

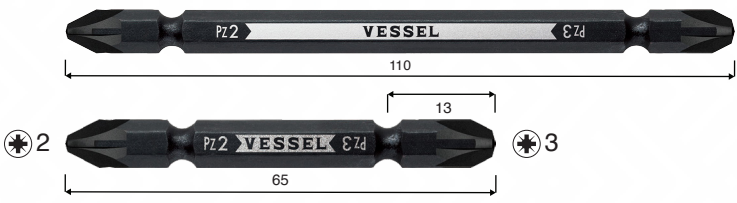

ONE POINT



4 USAGES BY 1 SOCKET.

Supports popular sizes for exterior wall work.



DOUBLE END "SAKISUBO" BIT

Improved durability with cushion effect at constricted part. For working with joist, stairs, composite panels, sash frame, interior finishing, etc.



BH-40



BH-41

Applications:

For the construction of exterior walls (siding), roofs, and solar mounts.

QB-22 Ball Quick Catcher

- Lightweight design using reinforced plastic.
- Cushion grip for a soft hand touch.
- Anodized finish resistant to discoloration.
- Can be used as a screwdriver. (Use for screws M4 or smaller.)

Code	Model	Content	Card Size (mm)	JAN (4907587)	RRP (RM)
486931	QB-22R	 Ball Quick Catcher (Red) 1pc.	120×50×26	027573	38.00
486933	QB-22G	 Ball Quick Catcher (Green) 1pc.	120×50×26	027597	38.00

SPQ: 10 sets

QB-10 Quick Catcher

- Bit can be replaced with just one hand.
- Smooth surface finish and pull-up type sleeve prevent tools from dropping.
- Strong ball chuck enables to mount a tool up to 500g.
- Flat ring with large diameter is easy to attach to a karabiner, etc.

Code	Model	Content	Card Size (mm)	JAN (4907587)	RRP (RM)
486922	QB-10B	 Quick Catcher (Blue) 1pc.	135×50×22	359551	40.00
486923	QB-10Y	 Quick Catcher (Yellow) 1pc.	135×50×22	359568	40.00

SPQ: 10 sets
Outer Ctn.: 100 sets

QBK3C Quick Catcher 3-pc set **NEW**

- Bit can be replaced with just one hand.
- Smooth surface finish and pull-up type sleeve prevent tools from dropping.
- Strong ball chuck enables to mount a tool up to 500g.
- Comes with a karabiner to hang onto your belt, etc.

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
486924	QB-K3C	Quick catcher (Red•Blue•Yellow), Karabiner (Black) 1pc. each	135x50x045	359681	98.00

SPQ: 10 sets
Outer Ctn. 100 sets



ONE POINT

Auto-lock by simply inserting.



Can tighten screws with a bit mounted.
(Use with M4 or smaller screws.)



One-push removal with one hand.




Insert and remove with one hand.

Pick up the sleeve and pull it out.



Auto-lock by inserting.

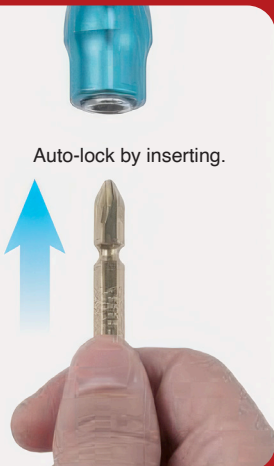

MTA

Super Hard Forged Mirror Socket

SHOCK ABSORPTION MATERIAL PREVENTS SHANK BREAKAGE!

Super hard forged ("GO-TAN") mirror sockets feature a polished "mirror finish". The step-free, streamlined design fits securely in the hand. Lightweight and compact. The deep hole type is especially suitable for tightening nuts, and is also ideal for roof work.



MTA20

Super Hard Forged Mirror Socket


Most versatile semi-long size. Shock absorption material & torsion prevent breakage. Hexagonal surface contact supports even nuts that have been just rounded. Streamlined design fits comfortably in the palm of the hand. Anti-resistant mirror finish. 10 sizes.

Hexagonal surface contact

Surface contact without damaging the corner of the bolt or nut.

Press-fit shaft for improved durability

Torsion effect on the shaft part reduces shaft breakage.

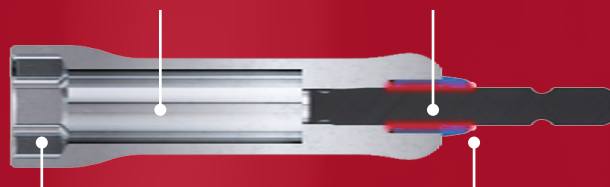

Deep hole type

Suitable for roofs and solar panels because the bolt clearance is long.

Shock absorbing material

Reduces stress concentration on the shaft during impact.

40v
Supported

Hex

Surface
Contact

Press-fit

26°30'
Chamfered

Drill
Impact
6.35mm

Color
coded

*Image is for illustration purposes.

MTA2010PS "GO-TAN" (Hard Forged) Mirror Socket 10-pc Set **NEW**

Model	A/F	φD (mm)	ℓ (mm)	Pilot Hole Depth (mm)	OAL (mm)
MTA200811	8	14	6.5	55	115
MTA201011	10	16	6.5	55	115
MTA201211	12	18	7.5	55	115
MTA201311	13	19	8	55	115
MTA201411	14	20	8	55	115
MTA201711	17	23	9	55	115
MTA201911	19	25	10	55	115
MTA202111	21	28	11	55	115
MTA202211	22	29	13	55	115
MTA202411	24	32	13	55	115

*The colors of the A/F column in the table indicate the color of the sticker and the resin pat of each socket.

Code	Model	Package Size (mm)	JAN (4907587)	RRP (RM)
485079	MTA2010PS	295 x 151 x 36	040145	688.00




SL209PS - "GO-TAN" Semi-long Socket, 9-pc Set

- Most versatile semi-long size.
- Streamlined design fits comfortably in the palm of the hand and has excellent anti-rust properties with a mirror finish (chrome plating).
- Surface contact type hexagonal sockets.

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
486745	SL209PS	"GO-TAN" (Hard Forged) Semi-long Socket 1pc. each A/F8, 10, 12, 13, 14, 17, 19, 21, 24	227x105x38	357991	288.00

SPQ: 10 sets



SL "GO-TAN" (Hard Forged) Semi-long Socket

- The most versatile medium length socket.
- Streamlined mirror finish (chrome plating) and excellent rust-proof socket.
- Surface contact type hexagonal socket.
- Patented.

Code	Model	A/F	φD	ℓ	Overall Length (mm)	Package Size (mm)	JAN (4907587)	RRP (RM)
486741	SL200790	7	11	6.5	90	143x35	359612	35.00
486731	SL200890	8	14	6.5	90	143x35	359445	36.00
486742	SL200990	9	15	6.5	90	143x35	359629	36.00
486732	SL201090	10	16	6.5	90	143x35	359452	36.00
486743	SL201190	11	17	7	90	143x35	359636	36.00
486733	SL201290	12	18	7.5	90	143x35	359469	40.00
486734	SL201390	13	19	8	90	143x35	359476	40.00
486735	SL201490	14	20	8	90	143x35	359483	40.00
486744	SL201590	15	21	8	90	143x35	359643	40.00
486736	SL201790	17	23	9	90	143x35	359490	42.00
486737	SL201990	19	25	10	90	143x35	359506	42.00
486738	SL202190	21	28	11	90	143x35	359513	42.00
486739	SL202290	22	29	12	90	143x35	359520	45.00
486740	SL202490	24	32	13	90	143x35	359537	65.00

*The colors of the A/F column in the table indicate the seal colors.

SPQ: 5pcs.

Outer Ctn.: 100pcs

A20BSQ Socket Adapter

6.35 9.5 12.7

- Adapter allowing to use a socket that you have.
- 3 sizes available depending on the socket mounting size.
- 3/8", 1/2" models: Improved durability by press-fitting.

Code	Model	Socket Mounting SQ	φD (mm)	Overall Length (sets)	Package Size (mm)	JAN (4907587)	RRP (RM)
486352	A20BSQ2	1/4" (6.35mm)	8	45	105x35	355904	35.00
486353	A20BSQ3	3/8" (9.5mm)	14	54	112x35	355911	36.00
486354	A20BSQ4	1/2" (12.7mm)	16	59	117x35	355928	40.00

SPQ: 5pcs.
Outer Ctn.: 100pcs.



A20WSQ Tilt Socket Adapter

12.7

- Adapter allowing to use a socket that you have.
- Pull the product to tilt, and push it to fix.
- Improved durability by press-fitting.
- Patented.

Code	Model	Socket Mounting SQ	φD (mm)	Overall Length (sets)	Package Size (mm)	JAN (4907587)	RRP (RM)
486356	A20WSQ4	1/2" (12.7mm)	16	60	117x35	355942	48.00

SPQ: 5pcs.
Outer Ctn.: 100pcs.




WBJ Tilt Bit Holder

- Thanks to a hand-turned grip, users can work in a stable posture.
- For mounting of half-down hardware and angle brackets.
- Patented.

Code	Model	Bit Mounting A/F	Outer Dia.	Overall Length (mm)	Package Size (mm)	JAN (4907587)	RRP (RM)
486357	WBJ100	6.35	18	100	160x35	355959	84.00

SPQ: 5pcs.
Outer Ctn.: 100pcs.

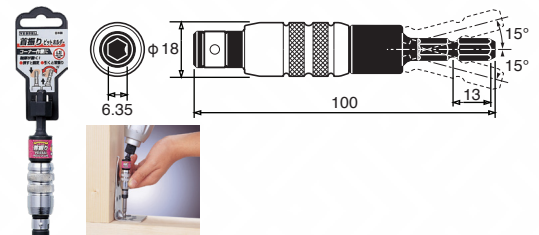


NEJ-123 Damaged Screw Remover 3-pc Set

- Bit rotating direction is counterclockwise for both drilling and screw removal (loosening direction).

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
485428	NEJ-123	NEJ-1/NEJ-2/NEJ-3 1pc. each	135x63x8	346490	78.00

SPQ: 10pcs.
Outer Ctn.: 200pcs.

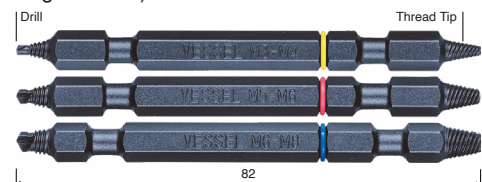


KA Drop-ceiling Socket

RoHS

- Super long deep hole type socket.
- The deep hole part of the socket has a diameter which is almost equal to the one of the full thread bolt. This design makes the socket light and easy to work upward.
- Surface contact dodecagonal socket.

Code	Model	A/F	Outer Dia.	Depth	Overall Length (mm)	Package Size (mm)	JAN (4907587)	RRP (RM)
484421	KA201730	17	23	255	300	355x35	357229	158.00
484422	KA201750	17	23	455	500	555x35	357236	184.00
484423	KA201770	17	23	655	700	755x35	357243	216.00

*The colors of the A/F column in the table indicate the seal colors.
SPQ: 5pcs.

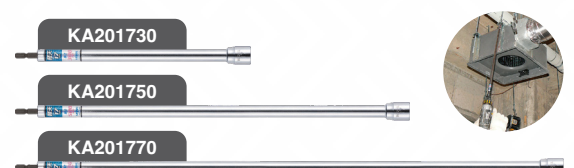

XA Extra Long Socket

RoHS

- For tightening nuts to a long protrusion bolt.
- Convenient for duct mounting and hanging bolts.
- Surface contact dodecagonal socket.

Code	Model	A/F	φD	ℓ	Overall Length (mm)	Package Size (mm)	JAN (4907587)	RRP (RM)
486132	XA201715	17	23	9	160	217x35	345936	92.00
486133	XA201915	19	25	10	160	217x35	345943	100.00
486134	XA202115	21	28	11	160	217x35	345950	108.00
486131	XA202415	24	32	13	160	217x35	357694	134.00

*The colors of the A/F column in the table indicate the seal colors.

SPQ: 5pcs.


Outer Ctn.: 50pcs.



TBH Torque Bit Holder **NEW**

- Can prevent from tightening with more torque than specified at the time of manual tightening and final tightening.
- 5-size variations, supporting tightening of screws from M3 to M6.
- Sliding sleeve prevents the bit from dropping.
- Can use 10,000 times.
- Tighten a screw manually, and 4-click sound is a proof of fully tightening.

Code	Model	A/F	φD	ℓ	Package Size (mm)	JAN (4907587)	RRP (RM)
486994	TBH-M3	0.7	φ14.5	75	40×160×18	038180	148.00
486995	TBH-M3.5	1.1	φ14.5	75	40×160×18	038197	148.00
486996	TBH-M4	1.4	φ14.5	75	40×160×18	038203	148.00
486997	TBH-M5	2.6	φ14.5	75	40×160×18	038210	148.00
486998	TBH-M6	4.6	φ14.5	75	40×160×18	038227	148.00



TBH5S Torque Bit Holder 5-pc Set **NEW**

- A set of 5 items that support tightening of screws from M3 to M6. Provided with a storage case.
- Can prevent from tightening with more torque than specified at the time of manual tightening and final tightening.
- When using, insert a bit to the bit holder, and attach it to the bit-replacement screwdriver or electric screwdriver.

Code	Model	Set Content	Card Size (mm)	JAN (4907587)	RRP (RM)
486999	TBH5S	Torque Bit Holder 1pc. each TBH-M3, M3.5, M4, M5, M6	103×161×23	038234	668.00

SPQ: 10 sets




AMD Cushion Drill Bit (For Steel)

RoHS

MG

- For various drilling work with iron, light metals, synthetic resins, wood, etc., and for drilling holes for tapping.
- High hardness HSS (HSS steel) keeps sharpness.



X-SHAPE (CROSS) THINNING PROCESS ENABLES HIGH-SPEED DRILLING AND REMARKABLE FITTING.


Code	Model	φD	ℓ	Flute Length	Overall Length (mm)	Card Size (mm)	JAN (4907587)	RRP (RM)
461111	AMD-1.0	1.0	22	12	72	165×35×12	602657	22.00
461001	AMD-2.0	2.0	32	24	82	165×35×12	600011	22.00
461004	AMD-3.0	3.0	44	33	94	165×35×12	600042	22.00
461010	AMD-4.0	4.0	58	43	108	165×35×12	600103	25.00
461014	AMD-5.0	5.0	69	52	120	165×35×12	600141	28.00
461016	AMD-6.0	6.0	76	57	127	165×35×12	600165	40.00

*Colors inside the table indicate the bit color.

SPQ: 10 sets




AND-3.0 or bigger
Drilling with light force, not using a center punch.



KMD "KESSAKU" Drill Bit

- The irregular spiral with different angles between the tip and the shank side discharge chips smoothly and improves workability.
- X-shape thinning can fit the point to drill and the pilot hole punching is not required.

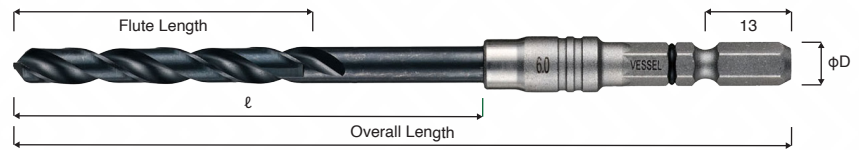


Code	Model	φD	A	Overall length (mm)	Card Size (mm)	Inner Ctn	Outer Ctn	JAN (4907587)	RRP (RM)
461142	KMD-7.0	7.0	65	109	165x35x11	10	10	602923	56.00
461144	KMD-8.0	8.0	67	111	165x35x11	10	10	602947	62.00
461146	KMD-9.0	9.0	73	117	165x35x11	10	10	602961	75.00
461148	KMD-10.0	10.0	76	120	165x35x15	5	5	602985	85.00
461150	KMD-11.0	11.0	81	125	165x35x15	5	5	603005	96.00
461152	KMD-12.0	12.0	83	127	165x35x15	5	5	603029	105.00
461154	KMD-13.0	13.0	85	130	165x35x15	5	5	603043	115.00

1pc./pack

EXH Slim Long Bit Holder **NEW**

- φ13mm chuck enables to be inserted even into a narrow area. [Extra Superalloy]
- The pull-release sleeve chuck prevents mounted bits from dropping.
- Can be used with double end bit, socket, hex shank grinding stone, and brush.
- Fully hardened Extra Superalloy shank, resistant to twisting and bending.
- Anodized finish aluminum sleeve, resistant to chemicals.
- Color variations according to the size.




Code	Model	Bit Mounting A/F	Outer Dia.	Overall Length (mm)	Package Size (mm)	JAN (4907587)	RRP (RM)
486786	EXH-100	6.35	13	100	40x160	31501	26.00
486787	EXH-150	6.35	13	150	40x160	31518	32.00
486788	EXH-200	6.35	13	200	40x160	31525	36.00
486789	EXH-250	6.35	13	250	40x160	31532	38.00

EXH-100/150/200 SPQ: 5pcs

EXH-250 SPQ: 5pcs

DXH Slim Long Bit Holder DX **NEW**

- φ13mm chuck enables to be inserted even into a narrow area.
- The pull-release sleeve chuck prevents mounted bits from dropping.
- Anodized finish aluminum sleeve, resistant to chemicals.
- Color variations according to the size.
- Can be used with double end bit, socket, hex shank grinding stone, and brush.
- Fully hardened Extra Superalloy shank, resistant to twisting and bending.
- φ8mm round shank. Less torque-loss.
- Rotating grip for holding the shank for stable and secured tightening.



Code	Model	Bit Mounting A/F	Outer Dia.	Overall Length (mm)	Package Size (mm)	JAN (4907587)	RRP (RM)
486790	DXH-250	6.35	13	250	40x160	31549	64.00
486791	DXH-350	6.35	13	350	40x160	31556	70.00
486792	DXH-450	6.35	13	450	40x160	31563	76.00
486793	DXH-600	6.35	13	600	40x160	31570	90.00

DXH-250/350 SPQ: 5pcs

DXH-450/650 SPQ: NIL



Extra Superalloy

Extra Superalloy

220USB

Rechargeable BALL GRIP Screwdriver

ELECTRIC & MANUAL SCREWDRIVERS MAKE PROGRESS



220USB
**Rechargeable BALL
GRIP Screwdriver**

The overwhelmingly easy-to-use Ball-grip Screwdriver has achieved a significant evolution. New proposals for electrically power assisted products incorporating a lithium ion battery and motor. Furthermore, aiming for the ultimate ease-of-use.

Reinforced gears + Front housing
20% improved strength



No confusion even when charging.
USB Type-C



Prevent the accidental drop.
**Anti-drop lanyard
can be attached.**



3.6v
800mAh

**Li-ion
Battery**

High brightness
LED

	 <p>220USB-C1 Rechargeable Ball-Grip Screwdriver</p>	 <p>220USB-S1 Rechargeable Ball-Grip Screwdriver High Speed</p>	 <p>220USB-P1 Rechargeable Ball-Grip Screwdriver PLUS</p>
Code	148507	148503	148504
Model	220USB-C1	220USB-S1	220USB-P1
Specs	<p>No load speed:</p> <ul style="list-style-type: none"> • 280 rpm <p>Maximum Torque:</p> <ul style="list-style-type: none"> • 3.0 N·m <p>Manual Torque:</p> <ul style="list-style-type: none"> • 12 N·m <p>Compatible bit size:</p> <ul style="list-style-type: none"> • 6.35 mm hex <p>Compact grip:</p> <ul style="list-style-type: none"> • Total length 147 mm <p>Weight:</p> <ul style="list-style-type: none"> • Approx. 170g <p>USB Type-C charging Built-in LED light for work visibility</p>	<p>No load speed:</p> <ul style="list-style-type: none"> • 1200 rpm <p>Maximum Torque:</p> <ul style="list-style-type: none"> • 0.4 N·m <p>Manual Torque:</p> <ul style="list-style-type: none"> • 10 N·m <p>Compatible bit size:</p> <ul style="list-style-type: none"> • 6.35 mm hex <p>Compact grip:</p> <ul style="list-style-type: none"> • Total length 140 mm <p>Weight:</p> <ul style="list-style-type: none"> • Approx. 160g <p>MicroUSB Type-B Built-in LED light for work visibility</p>	<p>No load speed / Torque:</p> <ul style="list-style-type: none"> • LO 280 rpm / 1.2 N·m • MID 340 rpm / 1.6 N·m • HI 400 rpm / 2.0 N·m <p>Manual Torque:</p> <ul style="list-style-type: none"> • 12 N·m <p>Compatible bit size:</p> <ul style="list-style-type: none"> • 6.35 mm hex <p>Compact grip:</p> <ul style="list-style-type: none"> • Total length 147 mm <p>Weight:</p> <ul style="list-style-type: none"> • Approx. 170g <p>USB Type-C charging Built-in LED light for work visibility</p>
Accessories	<p>Bit: $\Phi 2$ (100mm), USB Charging Cable (1m) *When using the AC adapter, portable charger, or other, please choose the output 5V-1A type.</p> 	<p>Bit: $\Phi 2$ (100mm), USB Charging Cable (1m) *When using the AC adapter, portable charger, or other, please choose the output 5V-1A type.</p> 	<p>Bit: $\Phi 2$ (100mm), USB Charging Cable (1m) *When using the AC adapter, portable charger, or other, please choose the output 5V-1A type.</p> 
Card Size (mm)	250x100x64	250x105x75	250x105x75
JAN (4907587)	037275	028150	029904
RRP (RM)	190.00	200.00	240.00

Applications:
Switchboard or control panel assembly /
Lighting equipment / Rack assembly /
OA equipment maintenance, etc.

Applications:
General electrical work / Air conditioner
installation or equipment work / Automotive
and motorcycle maintenance / DIY, etc.

e-ASSIST
ELECTRIC & MANUAL

Electric Output
1.0 N · m

60
tooth-gear

No-load Speed
400 rpm

Screw tightening

Rotate right

Screw loosening

Rotate left

Red : Charging
Green : Complete Charging

1/4
Inch

3/8
Inch

215mm (8-1/2)
25mm (1)
35mm (1-3/8)
125mm (5)

USB
Type-C



400ER2-1ME e-ASSIST MINI Ratchet Wrench Set

- Supplied in a dedicated case that is useful for storage and carrying.
- Comes with 31 pieces replaceable tools.
- Sockets are color-coded by size.

Code	Model	Weight (g)	Package Size (mm)	SPQ	JAN (4907587)	RRP (RM)
147219	400ER2-1ME	1563	268×223×70	1	038821	598.00

Inner Ctn.: 5 sets.




100 Powerful Tang-Thru Screwdriver

RoHS
MG
Cr-V. steel

- Wooden, tang-thru type, with large nut.
- Large and long grip comfortable to hold.
- Black point tip.

Code	100		JAN (4907587)	RRP (RM)
111051	⌀5.5 × 75	5.0 0.8 75 5.8 27.0 182	070289	34.00
111052	⌀6 × 100	6.0 0.9 100 6.4 30.5 223	070296	42.00
111061	⌀6 × 300	6.0 0.9 300 6.4 30.5 423	070814	62.00
111053	⌀8 × 150	8.0 1.1 150 8.0 34.0 294	070302	64.00
111054	⌀1 × 75	⊕No.1 75 5.8 27.0 182	070319	34.00
111055	⌀2 × 100	⊕No.2 100 6.4 30.5 223	070326	42.00
111066	⌀2 × 300	⊕No.2 300 6.4 30.5 423	070821	60.00
111056	⌀3 × 150	⊕No.3 150 8.0 34.0 294	070333	60.00

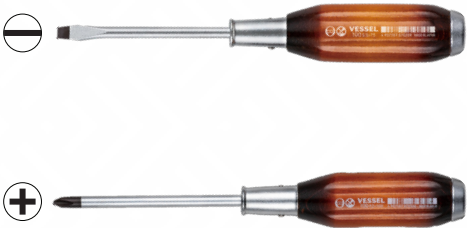


83L LED Voltage Detection Screwdriver

- For general household use to test current flow and continuity.
- Long-life LED that lights brightly.
- Batteries can be replaced. (The included battery is for testing.)
- Pencil type for easy carrying.

Code	Voltage Detection Range		Inner Ctn.	JAN (4907587)	RRP (RM)
125106	100 to 250V AC	4.0 0.45 20 17.5 130	10	013033	48.00

- ⚠ **Caution (Voltage Detection Screwdriver):**
- Be sure to check the lighting before use.
 - Be careful of short circuit and electric shock.
 - Use within the voltage detection range.
 - Do not use the product with water, oil, etc. on it.
 - Overloading may cause damages to screws or injury.

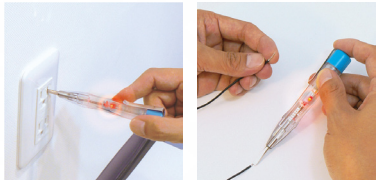

730 Super Cushion Tang-Thru Screwdriver



- "Super Cushion" grip fits your hand perfectly.
- Tang-thru type with a star-shaped end cap for hammering.
- Rust-resistant black chrome plating.
- Patented.

Code	730							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125231	⊖5.5 × 75	5.5	0.8	75	5.5	29	182	6	120	070289	30.00
125232	⊖6 × 100	6.0	0.9	100	6.4	32	215	6	120	070296	36.00
125233	⊖6 × 150	6.0	0.9	150	6.4	32	265	6	120	070814	42.00
125234	⊖8 × 150	8.0	1.1	150	8.0	34	276	6	60	070302	54.00
125235	⊕1 × 75	⊕No.1	75	5.5	29	182		6	120	070319	30.00
125236	⊕2 × 100	⊕No.2	100	6.4	32	215		6	120	070326	38.00
125237	⊕2 × 150	⊕No.2	150	6.4	32	265		6	120	070821	42.00
125238	⊕3 × 150	⊕No.3	150	8.0	34	276		6	60	070333	56.00



2200 Ball Ratchet Screwdriver



- 36-tooth gear ratchet built-in. Smooth working with fine tuning.
- Shank cover prevents short circuits. Thin shank is convenient for terminal block work.
- Fully-hardened shank. Replacement blade is available as option.

Code	2200							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125395	⊖6 × 100	6.0	0.8	100	6.0	41	200	6	60	105042	70.00
125396	⊖6 × 150	6.0	0.8	150	6.0	41	250	6	60	105059	74.00
125345	⊕2 × 100	⊕No.2	100	6.0	41	200		6	60	105011	66.00
125346	⊕2 × 150	⊕No.2	150	6.0	41	250		6	60	105028	70.00
125347	⊕3 × 150	⊕No.3	150	6.0	41	250		6	60	105035	74.00

⚠ Caution: This is not an insulated screwdriver. For safety, shut off power supply before use.



2200B Ball Ratchet Screwdriver Replacement Blade



- Fully-hardened shank.
- Can be replaced by pulling out the ball-grip part of No.2200.

Code	2200B							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125398	⊖6 × 150	6.0	0.8	150	6.0	208		6	60	105165	30.00
125349	⊕2 × 150	⊕No.2	150	6.0	208			6	60	105127	28.00
125350	⊕3 × 150	⊕No.3	150	6.0	208			6	60	105134	28.00



200 Ball-Grip Insulated Screwdriver



- Passed 7 strict tests (IEC60900) required for VDE certification.
- Shank cover prevents short-circuit accidents, and the slim design is convenient for terminal block work.
- Cushion grip. Grip-end with a dent of ⊕ or ⊖ to recognize the type by touch.

Code	200							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125841	⊖5 × 0.8 × 75	5.0	0.8	75	5	32	150	6	60	007544	26.00
125842	⊖6 × 1.0 × 100	6.0	1.0	100	6	41	189	6	60	007551	34.00
125843	⊖6 × 1.0 × 150	6.0	1.0	150	6	41	239	6	60	007568	38.00
125844	⊕1 × 75	⊕No.1	75	5	32	150		6	60	007575	26.00
125845	⊕2 × 100	⊕No.2	100	6	41	189		6	60	007582	34.00
125846	⊕2 × 150	⊕No.2	150	6	41	239		6	60	007599	38.00
125847	⊕3 × 150	⊕No.3	150	6	41	239		6	60	007605	42.00



220 Ball-Grip Screwdriver



- Transmits ample tightening force to screw.
- Cushion grip color-coded by ⊕ ⊖.
- High precision black point tip.
- ⊕3 is designed with a slim and long shank, good for screws of large terminal blocks.

Code	220							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125351	⊖5.5 × 75	5.5	0.8	75	5.5	32	156	6	60	075703	22.00
125361	⊖5.5 × 100	5.5	0.8	100	5.5	32	181	6	60	075666	24.00
125362	⊖5.5 × 150	5.5	0.8	150	5.5	32	231	6	60	075673	28.00
125352	⊖6 × 100	6.0	0.9	100	6.4	41	200	6	60	075727	28.00
125353	⊖6 × 150	6.0	0.9	150	6.4	41	250	6	60	075734	30.00
125354	⊖6 × 200	6.0	0.9	200	6.4	41	300	6	60	075741	34.00
125363	⊖6 × 300	6.0	0.9	300	6.4	41	400	6	60	008268	48.00
125376	⊖8 × 150	8.0	1.1	150	6.4	41	250	6	60	008640	40.00
125355	⊕1 × 75	⊕No.1		75	5.5	32	156	6	60	075710	22.00
125371	⊕1 × 100	⊕No.1		100	5.5	32	181	6	60	075680	24.00
125372	⊕1 × 150	⊕No.1		150	5.5	32	231	6	60	075697	28.00
125375	⊕2 × 75	⊕No.2		75	5.5	32	156	6	60	008633	24.00
125356	⊕2 × 100	⊕No.2		100	6.4	41	200	6	60	075758	28.00
125357	⊕2 × 150	⊕No.2		150	6.4	41	250	6	60	075765	30.00
125358	⊕2 × 200	⊕No.2		200	6.4	41	300	6	60	075772	34.00
125359	⊕2 × 300	⊕No.2		300	6.4	41	400	6	60	008244	48.00
125374	⊕3 × 150	⊕No.3		150	6.4	41	250	6	60	075659	38.00



970 MEGADORA Clip Remover



- One model for both large and small tips. Suitable for many clips used with automobiles.
- Chrome plating, not causing scratches on a painted metal plate.
- Optimally angled for working in cramped spaces, such as, door trim, wire binding clip, and so on.

Code	970						Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125721	CR x 120	12/7	120	7.0	34	230	6	60	108210	58.00



980 MEGADORA IMPACTA



- Tang-Thru nut with cam rotation mechanism.
- High precision black point tip

Code	980						Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125941	⊕2 × 100	⊕No.2	100	6.4	34	213	6	60	107916	68.00
125942	⊕2 × 150	⊕No.2	150	6.4	34	263	6	60	107923	76.00
125943	⊕3 × 150	⊕No.3	150	8.0	36	278	6	60	107930	80.00



900 MEGADORA Standard Screwdriver



- JAWSFIT Phillips tip that firmly bites into a screw head.
- A knurled shank is useful for non-slip quick turning by fingers and for widening a hole on wood materials or boards.

Code	900							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125701	⊖5.5 × 75	5.5	0.8	75	5.5	30	175	6	60	108050	26.00
125702	⊖6 × 100	6.0	0.9	100	6.4	34	210	6	60	108067	28.00
125703	⊖6 × 150	6.0	0.9	150	6.4	34	260	6	60	108074	32.00
125704	⊖8 × 150	8.0	1.1	150	8.0	36	275	6	60	108081	42.00
125705	⊕1 × 75	⊕No.1	75	5.5	30	175		6	60	108012	30.00
125706	⊕2 × 100	⊕No.2	100	6.4	34	210		6	60	108029	34.00
125707	⊕2 × 150	⊕No.2	150	6.4	34	260		6	60	108036	38.00
125708	⊕3 × 150	⊕No.3	150	8.0	36	275		6	60	108043	56.00



910 MEGADORA Thin Shank Screwdriver



- Thin shank type with a dia. 4mm or smaller shank.
- High precision black point tip.

Code	910							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125746	⊖3 × 75	3.0	0.4	75	3.0	21	153	12	120	108937	20.00
125747	⊖3 × 100	3.0	0.4	100	3.0	21	178	12	120	108944	22.00
125748	⊖4 × 75	4.0	0.5	75	4.0	21	153	12	120	108951	22.00
125749	⊖4 × 100	4.0	0.5	100	4.0	21	178	12	120	108968	24.00
125750	⊖4 × 150	4.0	0.5	150	4.0	21	228	12	120	108975	26.00
125751	⊖4 × 200	4.0	0.5	200	4.0	21	278	12	120	108982	28.00
125742	⊕0 × 75	⊕No.0	75	3.0	21	153		12	120	108890	20.00
125743	⊕0 × 100	⊕No.0	100	3.0	21	178		12	120	108906	22.00
125744	⊕1 × 75	⊕No.1	75	4.0	21	153		12	120	108913	24.00
125745	⊕1 × 100	⊕No.1	100	4.0	21	178		12	120	108920	26.00



900RT-7P MEGADORA Bit-replaceable Ratchet Screwdriver (7-pc. bit set) **NEW**

- 7 bits that support commonly-used 9 types of tip size and convenient ratchet handle are provided in a sturdy polyester fabric pouch.

Code	Model	Set Content	Package Size (mm)	JAN (4907587)	RRP (RM)
125831	900RT-7P	Handle, Bit (110mm), ⊕1/⊕2, ⊕2/⊕3, ⊖5/⊖6, Bit (65mm) ●3, ●4, ●5, ●6	224 × 123 × 65	039415	198.00

SPQ: 1set,
Inner CTN: 20sets



960 MEGADORA Insulated Screwdriver



- Flat-surface grip with cushion function at the hexagonal cross section point.
- Passed 7 strict tests (IEC60900) required for VDE certification.
- Double-layer insulation type. The inner layer is yellow so that peeling of the cover on the shank can be readily recognized.

Code	960							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125824	⊖0.8 × 5 × 75	5.0	0.8	75	6.8	30	177	6	60	109866	56.00
125825	⊖1.0 × 6 × 100	6.0	1.0	100	7.8	34	212	6	60	109873	60.00
125826	⊖1.2 × 8 × 150	8.0	1.2	150	9.8	36	277	6	60	109880	68.00
125821	⊕1 × 75	⊕No.1	75	6.8	30	177		6	60	109811	58.00
125822	⊕2 × 100	⊕No.2	100	7.8	34	212		6	60	109828	60.00
125823	⊕3 × 150	⊕No.3	150	9.8	36	277		6	60	109835	68.00



⚠ Caution:

- STOP IMMEDIATELY using this screwdriver when the yellow shank cover comes out or there is a damage or alike on the product.
- NEVER USE FOR HOT-LINE JOB. RISQUE OF ELECTRICAL SHOCK.

B-300 Wood-Compo S/D (w/hanging card)



- Non-slip grip even if used with oil-covered hands.
- "Wood-resin" is used to offer the texture of natural woods and its touch by hand.
- Rust-resistant black chrome-plated shank.

Code	B-300							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
120071	⊖5.5 × 75	5.5	0.8	75	5.5	30	182	6	120	080363	30.00
120072	⊖6 × 100	6.0	0.9	100	6.4	32	215	6	120	080370	34.00
120073	⊖6 × 150	6.0	0.9	150	6.4	32	265	6	60	080424	36.00
120074	⊖8 × 150	8.0	1.1	150	8.0	35	275	6	60	080387	50.00
120075	⊕1 × 75	⊕No.1	75	5.5	30	182		6	120	080394	30.00
120076	⊕2 × 100	⊕No.2	100	6.4	32	215		6	120	080400	34.00
120077	⊕2 × 150	⊕No.2	150	6.4	32	265		6	60	080431	36.00
120078	⊕3 × 150	⊕No.3	150	8.0	35	275		6	60	080417	50.00



B-380NT Wood-Compo Socket Screwdriver



- Non-slip grip even if used with oil-covered hands. "Wood-resin" is used to offer the texture of natural woods and its touch by hand.
- Black oxide plated socket.
- Hex shank for spanner (chrome plating).

Code	B-380NT									Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
120091	A/F 5 × 125	5.0	8	18	125	5.0	30	224		6	60	075178	48.00
120092	A/F 5.5 × 125	5.5	9	18	125	5.0	30	224		6	60	075185	48.00
120093	A/F 7 × 125	7.0	10	18	125	5.0	30	224		6	60	075192	50.00
120094	A/F 8 × 125	8.0	12	20	125	7.0	32	233		6	60	075208	54.00
120095	A/F 10 × 125	10.0	15	20	125	7.0	32	233		6	60	075215	56.00
120096	A/F 12 × 125	12.0	17	20	125	7.0	32	233		6	60	075222	58.00
120097	A/F 13 × 125	13.0	19	22	125	7.0	32	233		6	60	075239	58.00
120098	A/F 14 × 125	14.0	19	22	125	7.0	32	233		6	60	075246	58.00



B-330 Wood-Compo Tang-Thru Screwdriver



- Non-slip grip even if used with oil-covered hands. "Wood-resin" is used to offer the texture of natural woods and its touch by hand.
- Tang-thru type. With a nut good for striking by a hammer.
- Rust-resistant black chrome-plated shank.

Code	B-330							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
120041	⊖5.5 × 75	5.5	0.8	75	5.5	30	183	6	120	074362	36.00
120042	⊖6 × 100	6.0	0.9	100	6.4	32	217	6	120	074379	40.00
120043	⊖6 × 150	6.0	0.9	150	6.4	32	267	6	60	074553	44.00
120044	⊖8 × 150	8.0	1.1	150	8.0	35	277	6	60	074386	60.00
120045	⊕1 × 75	⊕No.1	75	5.5	30	183		6	120	074393	36.00
120046	⊕2 × 100	⊕No.2	100	6.4	32	217		6	120	074409	40.00
120047	⊕2 × 150	⊕No.2	150	6.4	32	267		6	60	074560	44.00
120048	⊕3 × 150	⊕No.3	150	8.0	35	277		6	60	074416	60.00



VESSEL SCREWDRIVER SET

V200X6 INSULATED BALL GRIP SCREWDRIVER 6PCS SET



Code	200							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125841	⌀5 × 0.8 × 75	5.0	0.8	75	5	32	150	6	60	007544	160.00
125842	⌀6 × 1.0 × 100	6.0	1.0	100	6	41	189	6	60	007551	
125844	⌀1 × 75	⊕No.1		75	5	32	150	6	60	007575	
125845	⌀2 × 100	⊕No.2		100	6	41	189	6	60	007582	
125846	⌀2 × 150	⊕No.2		150	6	41	239	6	60	007599	
125847	⌀3 × 150	⊕No.3		150	6	41	239	6	60	007605	



V330X6 WOOD-COMPO NON-SLIP SCREWDRIVER 6PCS Set



Code	B-300							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
120041	⌀5.5 × 75	5.5	0.8	75	5.5	30	183	6	120	074362	248.00
120042	⌀6 × 100	6.0	0.9	100	6.4	32	217	6	120	074379	
120044	⌀8 × 150	8.0	1.1	150	8.0	35	277	6	60	074386	
120046	⌀2 × 100	⊕No.2		100	6.4	32	217	6	120	074409	
120047	⌀2 × 150	⊕No.2		150	6.4	32	267	6	60	074560	
120048	⌀3 × 150	⊕No.3		150	8.0	35	277	6	60	074416	



V100X6 POWERFUL TANG-THRU SCREWDRIVER 6PCS Set



Code	100							JAN (4907587)	RRP (RM)
111051	⌀5.5 × 75	5.0	0.8	75	5.8	27.0	182	070289	248.00
111052	⌀6 × 100	6.0	0.9	100	6.4	30.5	223	070296	
111053	⌀8 × 150	8.0	1.1	150	8.0	34.0	294	070302	
111054	⌀1 × 75	⊕No.1		75	5.8	27.0	182	070319	
111055	⌀2 × 100	⊕No.2		100	6.4	30.5	223	070326	
111056	⌀3 × 150	⊕No.3		150	8.0	34.0	294	070333	



V900X6 MEGADORA JAWSFIT SCREWDRIVER 6PCS SET



Code	900							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125701	⊖5.5 x 75	5.5	0.8	75	5.5	30	175	6	60	108050	172.00
125702	⊖6 x 100	6.0	0.9	100	6.4	34	210	6	60	108067	
125704	⊖8 x 150	8.0	1.1	150	8.0	36	275	6	60	108081	
125705	⊕1 x 75	⊕No.1	75	5.5	30	175		6	60	108012	
125706	⊕2 x 100	⊕No.2	100	6.4	34	210		6	60	108029	
125708	⊕3 x 150	⊕No.3	150	8.0	36	275		6	60	108043	



V960X6 MEGADORA INSULATED SCREWDRIVER 6PCS SET



Code	960							Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125824	⊖0.8 x 5 x 75	5.0	0.8	75	6.8	30	177	6	60	109866	328.00
125825	⊖1.0 x 6 x 100	6.0	1.0	100	7.8	34	212	6	60	109873	
125826	⊖1.2 x 8 x 150	8.0	1.2	150	9.8	36	277	6	60	109880	
125821	⊕1 x 75	⊕No.1	75	6.8	30	177		6	60	109811	
125822	⊕2 x 100	⊕No.2	100	7.8	34	212		6	60	109828	
125823	⊕3 x 150	⊕No.3	150	9.8	36	277		6	60	109835	



V22005 BALL RATCHET SCREWDRIVER 5PCS SET



Code		2200								Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
125395	⊖6 x 100	6.0	0.8	100	6.0	41	200	6	60	6	60	105042	198.00
125398	⊖6 x 150	6.0	0.8	150	6.0	-	208	6	60	6	60	105165	
125345	⊕2 x 100	⊕No.2		100	6.0	41	200	6	60	6	60	105011	
125349	⊕2 x 150	⊕No.2		150	6.0	-	208	6	60	6	60	105127	
125350	⊕3 x 150	⊕No.3		150	6.0	-	208	6	60	6	60	105134	



ONE POINT



FOR PREVENTION MEASURES OF ELECTRIC SHOCK AND SHORT-CIRCUIT ACCIDENTS DURING ELECTRICAL WORK.

Insulated screwdriver certified by the International certification authority.

1000V AC or less, 1500V DC or less



1000V
IEC60900

VDE is an authorized third-party certification organization in Europe.



Reliable - Energization (Dielectric)
Inspection conducted for all pieces.

Stepless slim tip shape, making it easy to work in tight spaces.

Note: The shank diameter of -5 and +1 is 5 mm.



The tip-end supports connection terminals



HRW2004M-SW Wood-Compo Swivel Socket Wrench Set

6.35

RoHS

- The woody handle has a narrow shape that makes it easy to work in deep places and prevents slipping out.
- "Wood-resin" is used to offer the texture of natural woods and its touch by hand.
- The low profile swiveling head enables quick turning by holding the handle in the vertical position, like you use a screwdriver.
- Surface-contact socket prevents damages to bolt and nut corners.
- Comes in a two-layer case to prevent misplacing the tool.

Code	Model	Inner Ctn.	Outer Ctn.	Package Size (mm)	JAN (4907587)	RRP (RM)
162102	HRW2004M-SW	3	9	265 x 160 x 55	008725	518.00

Set Contents Table [1/4"sq. (6.35mm) 21pcs.]

Component	Detailed Contents
Handle	Wood-Compo swivel ratchet handle 1/4"sq. (6.35mm)
Contents	Extension bar Overall length 55mm 1/4"sq. (6.35mm) Extension bar Overall length 150mm 1/4"sq. (6.35mm) Quick spinner 1/4"sq. (6.35mm)
Hex key wrench	A/F 2.5, 3, 4, 5, 6, 8mm
1/4" sockets	A/F 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm



TD-6804MG Ratchet Screwdriver (4-pc bit set)

Bit
MG Cr-V Mo Steel

- Rotation angle of 5°, 72 gears for smooth clicking. Two pawls support the ratchet gear for high strength. Good for final tightening.
- Handle is made of oil-resistant cellulose acetate resin.
- Cassette type bit storage inside the handle for easy carrying.
- One-touch magnetic bit replacement.
- Bit insertion ●6.35mm.

TD-6804MG					
Code	Package Size (mm)	Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
247022	235 x 80 x 29	5	30	008459	62.00

Set Content

Bits	Body
⊕1, ⊕2, ⊕3, ⊖6 x 25.4mm	length 177mm dia. 28.5mm



TD-6816MG Ratchet Screwdriver (16-pc bit set)


Bit
MG Cr-V Mo Steel

- Rotation angle of 5°, 72 gears for smooth clicking. Two pawls support the ratchet gear for high strength. Good for final tightening.
- Handle is made of oil-resistant cellulose acetate resin.
- Cassette type bit storage inside the handle for easy carrying.
- 16 types of bits for a wide range of work. One-touch magnetic bit replacement.
- Bit insertion ●6.35mm.

TD-6816MG					
Code	Package Size (mm)	Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
247025	235x90x29	5	30	008480	92.00

Set Content

Bits	Body
⊕1, ⊕2, ⊕3, ⊖6, H2, H2.5, H3, H4, H5, T10H, T15H, T20H, T25H, T27H, T30H, T40H x 25.4mm	length 177mm dia. 28.5mm

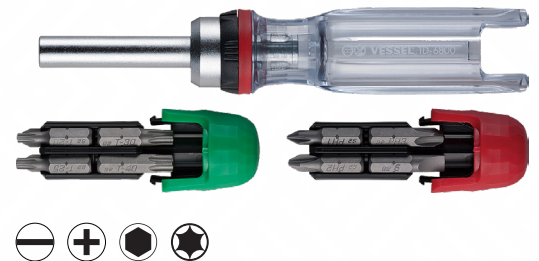

TORX® is registered trademark of Acument Intellectual Properties LLC, USA.
VESSEL is an official licensee of Acument Intellectual Properties LLC.

250001 Impact Driver

- Effective for very tight fastening and loosening rusted screws.
- Suited for automobile maintenance, and assembly and disassembly of machinery and equipment.
- For heavy-duty use.
- If the bit adapter is detached, a 12.7 mm socket can be attached.
- Bit insertion part ●8mm

250001				
Code	Package Size (mm)	Outer Ctn.	JAN (4907587)	RRP (RM)
246001	190x52x47	5	060921	220.00
Set Content				
Bits		Body		
⊖10, ⊕2, ⊕3, ⊕4 × 36		length 166mm dia. 32mm		


*See C51 on page 99 for replacement bits.



C51 Impact Driver Bit

RoHS

Code	Size Tip x L (mm)	Hardness	SPQ	Outer Ctn.	JAN (4907587)	RRP (RM)
431041	⊕2 × 36	G	10	250	330109	6.00
431042	80	G	10	250	330116	8.00
431051	⊕3 × 36	E	10	250	330123	6.00
431052	80	E	10	250	330130	8.00
431061	⊕4 × 36	E	10	250	330147	6.00
431171	⊖8 × 36	E	10	250	330154	7.00
431172	80	E	10	250	330161	10.00
431271	⊖10 × 36	E	10	250	330178	11.00
431272	80	E	10	200	330185	15.00

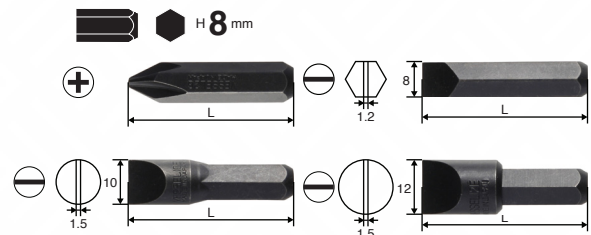

9836 Bit-replaceable Precision Screwdriver (36-pc bit set) NEW

Specifications

Product name	Bit-replaceable Precision Screwdriver (36-pc bit set)
Model	No.9836
Material	Case: ABS / Grip: Aluminum / Bit: Special alloy steel
Set contents	Stand type case × 1, Grip × 1, Precision bit × 36
Weight	About 200g (incl. case) About 18g (Grip)
Dimensions	Stand type case : 154x84x19mm Grip : 94mm(length) × 10mm(outer diameter) Individual box : 180x89x23mm
JAN	4907587033383
Code No.	125498
RRP (RM)	138.00

Bit Content

⊕	⊕000x1, ⊕00x2, ⊕0x2, ⊕1x1, ⊕2x1
⊖	⊖1.5x2, ⊖2.0x1, ⊖3.0x1, ⊖4.0x1
●	H0.89x1, H1.5x1, H2.0x1
★	T2x1, T3x1, T4x1, T5Hx1, T6Hx1, T7Hx1, T8Hx1, T9Hx1, T10Hx1, T15Hx1
☆	1IPR×1, 4IPR×1
Y	0.6x1, 1.0x1, 2.0x1, 2.5x1
●	2.0x1, 2.6x1
▲	2.0x1, 2.3x1
●	0.8x1

*Frequently used size ⊕00, ⊕0, and ⊖1.5 each come with 2pcs.



MR36 Bit-replaceable Precision Mini Ratchet Screwdriver (36-pc bit set) NEW

RoHS

- 52-tooth gear precision mini ratchet.
- Comes with 36 precision bits. Made of special alloy steel for industrial use. High-precision machining and hardening.
- Ratcheting handle and extension holder are made of stainless steel and rust-resistant. Bits are magnetically held and can be easily replaced.
- Convenient + Comfortable. The storage case is designed with rounded edges for comfort and ease of holding. Slide-open design.

The case stands by itself with the lid as a support. Bits are easy to see, select and pick out.

Code	Model	Set Content	Storage Case Size (mm)	JAN (4907587)	RRP (RM)
125499	MR36	⊕000, ⊕00x2, ⊕0x2, ⊕1, ⊕2, ⊖1.5x2, ⊖2, ⊖3, ⊖4, H0.89, H1.5, H2, T2, T3, T4, T5H, T6H, T7H, T8H, T9H, T10H, T15H, 1PR, 4IPR, ⊖0.6, ⊖1, ⊖2, ⊖2.5, ⊖2.0, ⊖2.6, ⊖2, ⊖2.3, ⊖0.8	180 × 89 × 23	037992	268.00

SPQ: 1set,
Inner CTN: 10sets,
Outer CTN: 20sets



TBK-300F/400F

Tough Fit Bucket Series (w/Lid)

**COMES WITH THE LID.
THIS BUCKET CAN BE USED
LIKE A TOOL BOX!**



Can organize tools neatly with the replaceable inner case! Can find soon a tool that you want to use!



Hanging the bucket from the shoulder or the neck, it is possible to work at hand without interruption.



As provided with the lid, the items inside will not be out of the bucket even if multiple bucket are stacked.



TBK-300F Tough Fit Bucket M (w/Lid) **NEW**

- Storage capacity 6kg.
- Provided with a replaceable lid. Wastes will not come inside.
- Organize neatly. Provided with an inner case to store tools.
- Free-standing bucket that will not lose its shape even if multiple buckets are vertically stacked or a long tool is inside.
- The handle enables to change the work place easily.
- The commercially available accessories compatible with the MOLLE system can be attached.

Code	Model	Product Size (mm)	Weight (g)	JAN (4907587)	RRP (RM)
141047	TBK-300F	About 250×350×170	1447	041197	278.00

Package Size (mm) : 410×300×110
Outer Ctn.10



TBK-400F Tough Fit Bucket L (w/Lid) **NEW**

- Storage capacity 8kg.
- Provided with a replaceable lid. Wastes will not come inside.
- Organize neatly. Provided with an inner case to store tools.
- Free-standing bucket that will not lose its shape even if multiple buckets are vertically stacked or a long tool is inside.
- The handle enables to change the work place easily.
- The commercially available accessories compatible with the MOLLE system can be attached.
- Comes with a shoulder belt to carry the bucket by hanging from the shoulder.
- Comes with a hook for hanging from a stepladder.

Code	Model	Product Size (mm)	Weight (g)	JAN (4907587)	RRP (RM)
141048	TBK-400F	About 250×420×200	1546	041203	328.00

Package Size (mm) : 480×380×120
Outer Ctn.10



DKS-9 Tool Set **NEW**

Code	Item PKG (mm)	Contents	RRP (RM)
141046	330 × 180 × 100	Crimping Tool (for Ring Sleeve E) Water Pump Pliers (230mm) VA Cable Stripper (VVF1.6mm×2/×3, 2.0mm×2/×3) Eccentric Heavy-Duty Pliers (175mm) Electric Air Adjust Knife (DAK-1) Ball Grip Screwdrivers ×2 (No220 +2×100 / -5.5×75) Convex Rule (3m) Storage Case Instruction Manual	988.00



MAC-01K Molle Accessories D-Ring **NEW**

Code	Model	Overall Length (mm)	Weight (g)	Inner C/T	Outer C/T	RRP (RM)
148707	MAC-01K	90	8	10	200	36.00



MAC-02K Molle Accessories Triangular Carabiner **NEW**

Code	Model	Overall Length (mm)	Weight (g)	Inner C/T	Outer C/T	RRP (RM)
148708	MAC-02K	100	9	10	200	42.00



TBK-300 Cable Tie Holder (for 3 sizes) **NEW**

- Can store in this holder 3 different ties (200, 250, and 300mm). Best for cable bundling required for in-panel cable connection and wiring on a cable tray.

Code	Model	Body Size (mm) (Except Protrusion)	Weight (g)	JAN (4907587)	RRP (RM)
141053	TBK-300	133 x 430	319	041258	138.00

Package Size (mm) : 500x180x70
Outer Ctn.20



The belt loop with a button on the reverse side enables this to be attached to the waist belt.

Refill port

- Zipper pull with a size indication to prevent from taking unnecessary ties.



D-ring

- Can attach to a waist belt by using a carabiner or a hook.
- hanging nearby with a suction cup (accessory) is useful for work at hand such as in-panel wire connection.



Opening

- Diamond-cut opening for easy take-out of cable ties with no drop.

8309SB Smooth Ball Hex Wrench 9-pc. Set **NEW**

Extra Superalloy

Tilting angle 38°

Fully hardened

MG

- Ball point that has a dodecagonal-shaped neck for smooth operation.
- Maximum tilting angle 38° (designed value).
- Made of Extra Superalloy (fully hardened and magnetized) that is resistant to twisting and bending.
- Color-coded painting by the size.
- Provided with Magnetizer that can magnetize and demagnetize the wrench.
- Provided with Extension pipe.
- Made in Japan

Code	Model	Set Content	Accessories	SPQ (set)	JAN (4907587)	RRP (RM)
143660	8309SB	Hex1.5, 2, 2.5, 3, 4, 5, 6, 8, 10mm	Magnetizer, Holder, Extension pipe	10	041555	238.00

Package size (mm): 295x110x27



8209SB-S Smooth Ball Hex Wrench Stubby (Short Type) 9-pc. Set

Extra Superalloy

Tilting angle 38°

Fully hardened

MG

- Ball point that has a dodecagonal-shaped neck for smooth operation.
- Maximum tilting angle 38° (designed value).
- Made of Extra Superalloy (fully hardened and magnetized) that is resistant to twisting and bending.
- Color-coded painting by the size.
- Provided with Magnetizer that can magnetize and demagnetize the wrench.
- Provided with Extension pipe.
- Made in Japan

Code	Model	Set Content	Accessories	SPQ (set)	JAN (4907587)	RRP (RM)
143661	8209SB-S	Hex1.5, 2, 2.5, 3, 4, 5, 6, 8, 10mm	Magnetizer, Holder, Extension pipe	10	041562	228.00

Package size (mm): 295x110x27



8309SB-L Smooth Ball Hex Wrench (Long Type) 9-pc. Set **NEW**

Extra Superalloy

Tilting angle 38°

Fully hardened

MG

- Ball point that has a dodecagonal-shaped neck for smooth operation.
- Maximum tilting angle 38° (designed value).
- Made of Extra Superalloy (fully hardened and magnetized) that is resistant to twisting and bending.
- Color-coded painting by the size.
- Provided with Magnetizer that can magnetize and demagnetize the wrench.
- Provided with Extension pipe.
- Made in Japan

Code	Model	Set Content	Accessories	SPQ (set)	JAN (4907587)	RRP (RM)
143662	8309SB-L	Hex1.5, 2, 2.5, 3, 4, 5, 6, 8, 10mm	Magnetizer, Holder, Extension pipe	10	041579	258.00

Package size (mm): 295x110x27



8209BP Ball Point Wrench Stubby 9PC Set **NEW**



8209BP				
Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
143906	245x105x27	5	025036	148.00
8200BP				
Set Content		Accessories		
H 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		Holder		



8209BP-L Ball Point Wrench Stubby (Long Type) 9PC Set **NEW**



8209BP-L				
Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
143916	295x105x27	10	025135	170.00
8200BP-L				
Set Content		Accessories		
H 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		Holder		



8309BP Ball Point Wrench 9PC Set **NEW**



8309BP				
Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
143926	245x105x27	5	025234	146.00
8300BP				
Set Content		Accessories		
H 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		Holder		



8309BP-L Ball Point Wrench (Long Type) 9PC Set **NEW**



8309BP-L				
Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
143940	295x105x27	10	025371	168.00
8300BP-L				
Set Content		Accessories		
H 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		Holder		



8309BP-LIN Ball Point Wrench (Long Type) (Inch) 9PC Set **NEW**



8309BP-LIN				
Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
143950	295x105x20	10	025470	198.00
8300BP-LIN				
Set Content		Accessories		
A/F 1/16, 5/64, 3/32, 1/8, 5/52, 3/16, 1/4, 5/16, 3/8 inch		Holder		



8509BTX Ball End TORX Wrench 9PC Set **NEW**



8509BTX				
Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
143970	295x105x27	5	025678	236.00
8509BTX				
Set Content			Accessories	
Size T8, T9, T10, T15, T20, T25, T27, T30, T40			Holder	



8509TXH Tamper-proof TORX Wrench 9PC Set **NEW**



8509TXH				
Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
143980	245x105x27	5	025777	178.00
8509TXH				
Set Content			Accessories	
Size T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H			Holder	




8909BP RAINBALL L-wrenches 9PC Set



- Includes a holder that opens like a fan and that can be used as a stand together with a magnetizer. The magnetizer attached to the lower part of the holder can be used to fix the holder to a horizontal metal part such as a machine tool, automatic machine, or surface plate.
- The magnetizer can be removed from the holder to magnetize or demagnetize the wrench.
- For M1.6 to M12.


8909BP				
Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
144351	245x110x35	5	014900	250.00
8900BP				
Set Content			Accessories	
H1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm			Magnetizer/Holder	

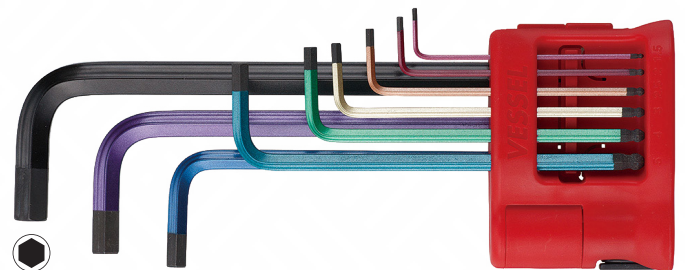

ONE POINT

W/MAGNETIZER

Can magnetize and demagnetize the wrench directly.

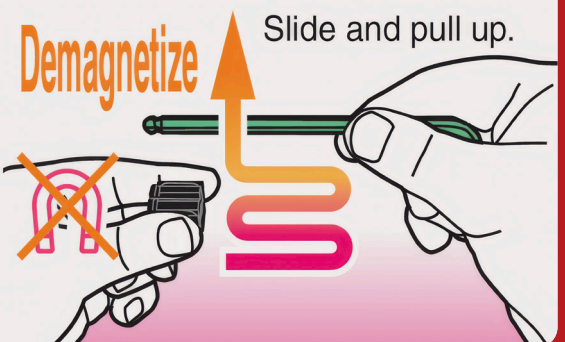

30000 Wire Stripper (Cardboard)

RoHS

- Perfectly and quickly strips off the sheath in one operation.
- Versatile for use with electrical equipment such as TVs and radios, electrical work, automotive electrical circuits, telegraphic telephone wiring, and others.
- Comes with a strip gauge. RoHS compliant.

Code	Model	Applicable wires	Handle Color	Outer Ctn.	JAN (4907587)	RRP (RM)
241001	300001	For solid wire 0.5/1.2/1.6/2.0mm	Green	5	060761	158.00
241002	300002	For solid wire 1.0/1.6/2.0/2.6/3.2mm	Red	5	060778	158.00
241005	300005	For stranded wire 0.9/1.25/2.0/3.5/5.5mm ²	Black	5	060792	158.00

Package size: 250x110x38mm



3500E-3/-4/-5 Wire Stripper

RoHS

- True Circular cutting edges do not damage core wires.
- Different colors by the grip for instant awareness of holding position, improving working efficiency.
- Thread cutters for small screws and bolts (for M3/M4).
- With cord attachment hole to prevent dropping.
- Cushion grip with AWG, mm, mm² conversion table.

Code	Model	Overall Length (mm)	Weight (g)	Colour	Inner Ctn.	Outer Ctn.	JAN (4907587)	RRP (RM)
141013	3500E-3	16.3	107	Red	Black	5	007223	98.00
141014	3500E-4	16.3	107	Yellow	Black	5	007230	98.00
141017	3500E-5	16.3	107	Blue	Black	5	032201	98.00



TD-73MC Plate Ratchet Screw Catcher

Screw Holder Bit
MG Cr-V Mo steel


- Magnetic screw catcher securely holds screws.
- Includes HEX bits for assembly of furniture and bicycles.
- Speed ring for quick turning. Square drive 6.35mm when removed.
- Bit insertion ●6.35mm.

TD-73MC

Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
250073	190x85x27	40	061799	68.00

Set Content

Bits	Body	Accessories
⊕1, ⊕2, ⊕3, ⊕4, ⊕6, H2.5, H3, H4, H5, H6 × 25.4mm	Plate ratchet screwdriver	Magnetic Screw Catcher, Bit belt holder

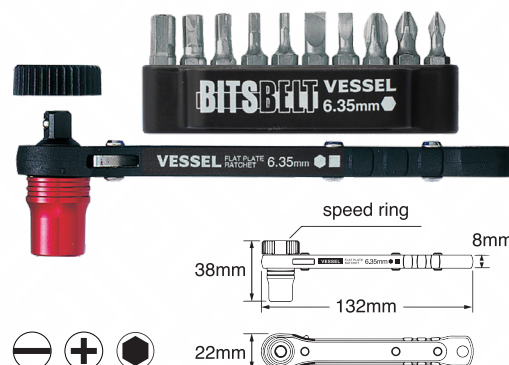

TX-12MC Plate Ratchet/Magnetic Screw Catcher (TORX)

Screw Holder Bit
MG Cr-V Mo steel


- Magnetic screw catcher securely holds screws.
- A set including TORX bits frequently used for maintenance work. Can also be used for tamper-proof TORX screws.
- Speed ring for quick turning. Square drive 6.35mm when removed.
- Bit insertion ●6.35mm.

TX-12MC

Code	Package Size (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
252022	190x85x27	10	061997	82.00

Set Content

Bits	Body	Accessories
T8H, T10H, T15H, T20H, T25H, T27H, T30H, T40H, ⊕2, ⊕6 × 25.4mm	Plate ratchet screwdriver	Magnetic Screw Catcher, Bit belt holder

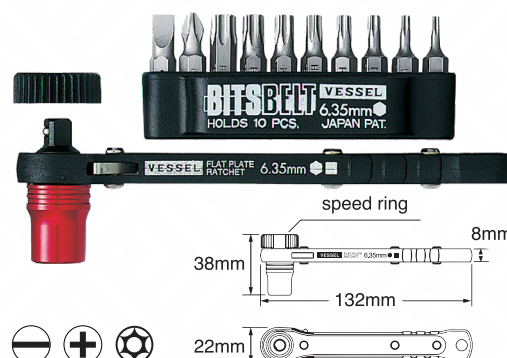

TORX® is registered trademark of Acument Intellectual Properties LLC, USA.
VESSEL is an official licensee of Acument Intellectual Properties LLC.

TD-25 / TD-25B Fine Mini Ratchet Screwdriver

Straight Type

- 60-gear model. 6-degree ratchet drive enables secure turning.
- Ultra-thin bit 20mm / Socket 24mm. Good for work in narrow spaces.

Code	Model	Set Content	Package Size (mm)	JAN (4907587)	RRP (RM)
251428	TD-25	Body(Straight), Holder 2pcs. Bit ⊕1, ⊕2, ⊕3, ⊖4, ⊖6, H2.5, H3, H4, H5, H6×18mm	160×83×20	035448	90.00

SPQ: 20 sets

Angled Type

- 60-gear model. 6-degree ratchet drive enables secure turning.
- Ultra-thin bit 20mm / Socket 24mm. Good for work in narrow spaces.

Code	Model	Set Content	Package Size (mm)	JAN (4907587)	RRP (RM)
251432	TD-25B	Body(Angled), Holder 2pcs. Bit ⊕1, ⊕2, ⊕3, ⊖4, ⊖6, H2.5, H3, H4, H5, H6×18mm	160×83×20	035486	92.00

SPQ: 20 sets



TD-BS24 Bit Set / Socket Set

Bit

- Ultra-short bit enhancing usability.
- Connectable holder with size information.

Socket Bit

- Ultra-short socket enhancing usability.
- Color-coded size indication.
- Knurling for finger turning.
- Connectable holder with size indication.

Code	Model	Set Content	Package Size (mm)	JAN (4907587)	RRP (RM)
251448	TD-BS24	Socket H5.5, H7, H8, H10×21mm Holder 1pc.	120×55×20	036575	50.00



SLH2-1 2WAY SPEED L-HANDLE SET

Code	Model	Set Content	Package Size (mm)	JAN (4907587)	RRP (RM)
251441	SLH2-1	Speed handle(H6.35/SQ1/4), Bit ⊕1, ⊕2, ⊕3, ⊖4, ⊖6×25.4mm, Socket H8, 10, 12, 13, 14×25mm, Holder	230×84×35	035578	160.00



400PD2-1 2WAY POWER SCREWDRIVER SET


Code	Model	Set Content	Package Size (mm)	JAN (4907587)	RRP (RM)
251443	400PD2-1	Power screwdriver(H6.35/SQ1/4), Bit ⊕1, ⊕2, ⊕3, ⊖4, ⊖6×25.4mm, Socket H8, 10, 12, 13, 14×25mm, Holder	230×84×35	035592	178.00



A20HSQ 2WAY ADAPTER

- Dual-use drive for both socket and bit. Move the sleeve forward to use with a bit; backward to use with a socket.
- Good for an extension for a ratcheting driver.
- Can be used with the power tools (Compatible with 18V models).

Code	Model	Set Content	Package Size (mm)	JAN (4907587)	RRP (RM)
251444	A20HSQ	Adapter (H6.35/SQ1/4) x100mm	160×35×13	035608	46.00



TD-55 Precision Screwdriver Set

RoHS

- Main body made of stainless steel (end cap part made of resin)
- Packaged in a transparent case for easy carrying.

Code	Model	Set Content	Package Size Hanger included (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
251381	TD-55	⌀0.9, ⌀1.2, ⌀1.8, ⌀2.3, ⌀3.0, ⌀3.5	268×223×70	10	009210	76.00



TD-56 Precision Screwdriver Set

RoHS

- Main body made of stainless steel (end cap part made of resin)
- Packaged in a transparent case for easy carrying.
- RoHS compliant.

Code	Model	Set Content	Package Size Hanger included (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
251382	TD-56	⌀0.9, ⌀1.2, ⌀1.8, ⌀2.3, ⌀00, ⌀0	140×86×20	10	009227	76.00



TD-57 Precision Nut Driver Set

RoHS

- Main body made of stainless steel (end cap part made of resin)
- Packaged in a transparent case for easy carrying.

Code	Model	Set Content	Package Size Hanger included (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
251383	TD-57	⌀2.2, ⌀3.0, ⌀4.0, ⌀4.5, ⌀5.0, ⌀5.5	140×86×20	10	009234	98.00



TD-58 Precision Hex. Driver Set

RoHS

- Main body made of stainless steel (end cap part made of resin)
- Packaged in a transparent case for easy carrying.

Code	Model	Set Content	Package Size Hanger included (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
251384	TD-58	●0.89, ●1.27, ●1.5, ●2.0, ●2.5, ⌀00	140×86×20	10	009241	80.00



TD-56S Precision Screwdriver Set

RoHS

- Main body made of stainless steel (end cap part made of resin)
- Packaged in a transparent case for easy carrying.

Code	Model	Set Content	Package Size Hanger included (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
251389	TD-56S	⌀0.7, ⌀0.9, ⌀0000, ⌀000, ⌀00, ⌀0	140×86×20	10	005922	80.00



TD-56Y Precision Screwdriver Set

RoHS

- Main body made of stainless steel (end cap part made of resin)
- Packaged in a transparent case for easy carrying.

Code	Model	Set Content	Package Size Hanger included (mm)	Inner Ctn.	JAN (4907587)	RRP (RM)
251401	TD-56Y	⌀00, ●T5, ●1PR, Ⓐ3ULR-0, Ⓐ3ULR-F, Ⓐ3ULR-M	140×86×20	10	008619	140.00



TORX® is registered trademark of Acument Intellectual Properties LLC, USA.
 VESSEL is an official licensee of Acument Intellectual Properties LLC.
 Microstix® and Microstix are registered trademarks of OSG System Products, Inc.
 VESSEL is an official licensee of OSG SYSTEM PRODUCTS Co., LTD.


DAK Adjustable Electrician Knife

RoHS

- Rust-resistant stainless steel blade (DAK-2).
- Blade length can be adjusted to suit actual work (0 to 63 mm/slide pitch 5 mm).
- Safe because the blade can be stored, and compact when carrying or storing.
- Self-locking slide. The dial on the backside prevents the blade from rattling.
- The blade is replaceable. The blade is removable for sharpening.
- The elastomer body prevents slipping and ensures a firm grip.
- Equipped with a slit blade for easy vertical splitting of VVF (VA wire) sheath.
- With an anti-drop lanyard attachment hole.

Code	Model	Material (Blade)	Overall Length (mm)	Weight (g)	Color	SPQ (pcs.)	JAN (4907587)	RRP (RM)
252107	DAK-2	Stainless Steel	171	121	Black	10	033840	148.00
252109	DAK-4	Alloy Tool Steel	171	116	Orange	10	036926	148.00

Package size: 257×70×28mm

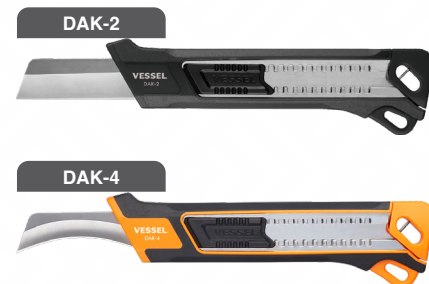

DAKB Replaceable Blade for Adjustable Electrician Knife

RoHS

- Replacement blade dedicated to the Adjustable Electrician Knife.
 - Stainless steel (DAKB-2)
 - Sickle-shaped (DAKB-4)
- Not interchangeable with a box cutter blade.

Code	Model	Material (Blade)	Overall Length (mm)	Weight (g)	SPQ (pcs.)	JAN (4907587)	RRP (RM)
252122	DAKB-2	Stainless Steel	94	25	5	033864	58.00
252128	DAKB-4	Alloy Tool Steel	94	20	5	036940	60.00

Package size: 160×47×5mm



ONE POINT

ADJUSTABLE BLADE LENGTH, ACCORDING TO THE WIRE SIZES.
EFFECTIVE POWER TRANSMISSION. SAFE AND COMFORT WORK!



[SAFE] SLIT BLADE FOR SPLITTING SHEATH

Can split the sheath of the VVF (VA cable) while the blade is fully stored in the body.



BLADE IS REPLACEABLE.

Blade can be taken out after removing the cap and pushing out the slider.



SLIDE LOCK

Adjust the blade length with the slider. It does not move when the hand is off.



[SAFE] ANTI-DROP LANYARD ATTACHMENT HOLE

Attach an anti-drop lanyard and prevent accidents due to dropping of tools.



Unrivaed Bimetallic Steel Reciprocating Saw Blades from VESSEL

Animal motifs represent the performance and features of the blades.



Blade mounting support

Blade mounting is designed in accordance with the blade tilt (5°).
Blade mounting is visually supported.



150 • 200 • 250 • 300

R-shaped corner *Patent Pending


Can insert the blade smoothly since the corner that has a contact with the power tool is rounded.



150 • 200 • 250 • 300



150 • 200 • 250

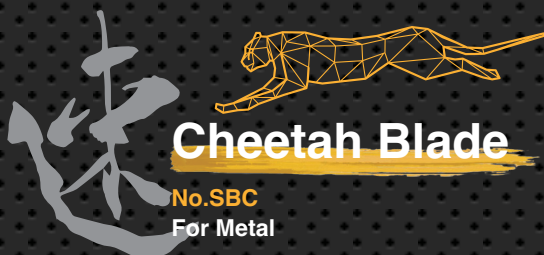

Cheetah Blade

No.SBC
For Metal



Rhino Blade

No.SBR
ALC/Demolition, Demolition



Lizard Blade

No.SBL
ALC/Demolition, Demolition

VESSEL

Cutting Capacity (mm)

METAL 14TPI			
Iron	3 ~ 8	Non-Ferrous Metal	3 ~ 8
ALC	-	Stainless Steel	3 ~ 8
Wood	-	Iron/SUS Steel	✓
PVC Pipe	-	Structural Steel	✓

METAL 14TPI			
Iron	1.5 ~ 4	Non-Ferrous Metal	1.5 ~ 4
ALC	-	Stainless Steel	1.5 ~ 4
Wood	-	Iron/SUS Steel	✓
PVC Pipe	-	Structural Steel	✓

METAL 24TPI			
Iron	~ 3	Non-Ferrous Metal	-
ALC	-	Stainless Steel	~ 3
Wood	-	Iron/SUS Steel	-
PVC Pipe	-	Structural Steel	-

● BLADE TIP: RAKER SET

Combination of teeth with set to spread the teeth to the left and right and teeth that are straightly arranged. High speed cutting and low vibration allow for efficient operation.

● BLADE TIP: WAVY SET

The teeth are arranged in a wavy pattern, resulting in quiet and efficient cutting with fewer burrs. The cutting surface is also smooth.



Cheetah Blade

No.SBC

Cheetah Blade 1pc. [Metal]

Code No.	Model No.	TPI	Overall Length	Blade Thickness	Applications	JAN (4907587)	RRP (RM)
114002	SBC-1415-1	14	150	0.9	Metal	030863	24.00
114004	SBC-1420-1	14	200	0.9	Metal	030887	32.00
114007	SBC-1425-1	14	250	0.9	Metal	030917	38.00
114010	SBC-1815-1	18	150	0.9	Metal	030948	25.00
114012	SBC-1820-1	18	200	0.9	Metal	030962	34.00
114015	SBC-1825-1	18	250	0.9	Metal	030993	38.00
114018	SBC-1830-1	18	300	0.9	Metal	031020	44.00
114020	SBC-2415-1	24	150	0.9	Metal	031044	25.00
114022	SBC-2420-1	24	200	0.9	Metal	031099	34.00

Unit: mm
Card size: 45x215x2mm (150mm), 45x265x2mm (200mm), 45x315x2mm (250mm), 48x335x2mm (300mm)
SPQ: 20sets (150 • 200 • 250mm) 5sets (300mm)

[SBC] Cheetah Blade 5-pc. [Metal]

Code No.	Model No.	TPI	Overall Length	Blade Thickness	Applications	JAN (4907587)	RRP (RM)
114003	SBC-1415-5	14	150	0.9	Metal	030870	108.00
114005	SBC-1420-5	14	200	0.9	Metal	030894	142.00
114008	SBC-1425-5	14	250	0.9	Metal	030924	175.00
114011	SBC-1815-5	18	150	0.9	Metal	030955	112.00
114013	SBC-1820-5	18	200	0.9	Metal	030979	150.00
114016	SBC-1825-5	18	250	0.9	Metal	031006	175.00
114019	SBC-1830-5	18	300	0.9	Metal	031037	200.00
114021	SBC-2415-5	24	150	0.9	Metal	031051	110.00
114023	SBC-2420-5	24	200	0.9	Metal	031136	142.00

Unit: mm
Card size: 49x215x16mm (150mm), 49x265x16mm (200mm), 49x315x16mm (250mm), 48x335x7mm (300mm)
SPQ: 5sets

Cutting Capacity (mm)

ALC/DEMOLITION 9TPI			
Iron	-	Non-Ferrous Metal	-
ALC	✓	Stainless Steel	-
Wood	✓	Iron/SUS Steel	-
PVC Pipe	✓	Structural Steel	-


● BLADE TIP: ALTERNATESET

This blade has teeth arranged alternately on the left and right. Suitable for rough cutting and speed-oriented cutting.

DEMOLITION 10&14TPI			
Iron	3 ~ 13	Non-Ferrous Metal	3 ~ 13
ALC	-	Stainless Steel	3 ~ 13
Wood	✓	Iron/SUS Steel	✓
PVC Pipe	✓	Structural Steel	✓

● BLADE TIP: WAVY SET

The teeth are arranged in a wavy pattern, resulting in quiet and efficient cutting with fewer burrs. The cutting surface is also smooth.



Rhino Blade

No.SBR



Rhino Blade 1pc. [ALC/Demolition, Demolition] [SBR]

Code No.	Model No.	TPI	Overall Length	Blade Thickness	Applications	JAN (4907587)	RRP (RM)
114024	SBR-0920-1	9	200	1.27	ALC Demolition	031143	34.00
114027	SBR-0925-1	9	250	1.27	ALC Demolition	031174	40.00
114030	SBR-0930-1	9	300	1.27	ALC Demolition	031204	48.00
114032	SBR-0415-1	10&14	150	1.27	Demolition	031280	34.00
114034	SBR-0420-1	10&14	200	1.27	Demolition	031303	35.00
114037	SBR-0425-1	10&14	250	1.27	Demolition	031365	42.00
114040	SBR-0430-1	10&14	300	1.27	Demolition	031396	50.00

Unit: mm
Card size: 45x215x2mm (150mm), 45x265x2mm (200mm), 45x315x2mm (250mm), 48x335x2mm (300mm)
SPQ: 20sets (150 • 200 • 250mm) 5sets (300mm)

Rhino Blade 5pc. [ALC/Demolition, Demolition] [SBR]

Code No.	Model No.	TPI	Overall Length	Blade Thickness	Applications	JAN (4907587)	RRP (RM)
114025	SBR-0920-5	9	200	1.27	ALC Demolition	031150	150.00
114028	SBR-0925-5	9	250	1.27	ALC Demolition	031181	184.00
114031	SBR-0930-5	9	300	1.27	ALC Demolition	031273	225.00
114033	SBR-0415-5	10&14	150	1.27	Demolition	031297	150.00
114035	SBR-0420-5	10&14	200	1.27	Demolition	031341	150.00
114038	SBR-0425-5	10&14	250	1.27	Demolition	031372	184.00
114041	SBR-0430-5	10&14	300	1.27	Demolition	031402	225.00

Unit: mm
Card size: 49x215x16mm (150mm), 49x265x16mm (200mm), 49x315x16mm (250mm), 48x335x7mm (300mm)
SPQ: 5sets

Cutting Capacity (mm)



Lizard Blade

No.SBL

DEMOLITION IN TIGHT SPACES 10&14TPI			
Iron	3 ~ 13	Non-Ferrous Metal	3 ~ 13
ALC	-	Stainless Steel	3 ~ 13
Wood	✓	Iron/SUS Steel	✓
PVC Pipe	✓	Structural Steel	✓

●BLADE TIP: WAVY SET



The teeth are arranged in a wavy pattern, resulting in quiet and efficient cutting with fewer burrs. The cutting surface is also smooth.



Lizard Blade 1pc. [Demolition in Tight Spaces]

SBL

Code No.	Model No.	TPI	Overall Length	Blade Thickness	Applications	JAN (4907587)	RRP (RM)
114042	SBL-0415-1	10 & 14	150	1.27	Demolition in tight spaces	031419	34.00
114044	SBL-0420-1	10 & 14	200	1.27	Demolition in tight spaces	031433	35.00
114046	SBL-0425-1	10 & 14	250	1.27	Demolition in tight spaces	031457	42.00

Unit: mm

Card size: 45×215×2mm (150mm), 45×265×2mm (200mm), 45×315×2mm (250mm)

SPQ:20sets

Lizard Blade 5-pc. set [Demolition in Tight Spaces]

SBL

Code No.	Model No.	TPI	Overall Length	Blade Thickness	Applications	JAN (4907587)	RRP (RM)
114043	SBL-0415-5	10 & 14	150	1.27	Demolition in tight spaces	031426	142.00
114045	SBL-0420-5	10 & 14	200	1.27	Demolition in tight spaces	031440	150.00
114047	SBL-0425-5	10 & 14	250	1.27	Demolition in tight spaces	031464	184.00

Unit: mm

Card size: 49×215×16mm (150mm), 49×265×16mm (200mm), 49×315×16mm (250mm)

SPQ:5sets



Woodworking/Bamboo cutting

No.SBW

Cheetah Blade

No.SBW-1022-1

For woodworking: Good for demolition work in remodeling (opening, cutting of puncheons, etc.). For cutting plants, dismantling furniture, etc.

Cheetah Blade 1pc. [Woodworking]

SBW

Code No.	Model No.	Pitch	Overall Length	Blade LENGTH	Blade Thickness	Applications	JAN (4907587)	RRP (RM)
114049	SBW-1022-1	3.0	225	197.5	0.9	Woodworking	031488	54.00

Unit: mm

Card size: 45×265×2mm

SPQ:20sets

Cheetah Blade

No.SBW-1422-1

For bamboo: For cutting and processing of bamboo.

Cheetah Blade 1pc. [Bamboo]



SBW

Code No.	Model No.	Pitch	Overall Length	Blade LENGTH	Blade Thickness	Applications	JAN (4907587)	RRP (RM)
114048	SBW-1422-1	2.15	225	196.5	0.8	Bamboo	031471	54.00

Unit: mm


Card size: 45×265×2mm

SPQ:20sets



VESSEL

Think Solutions!

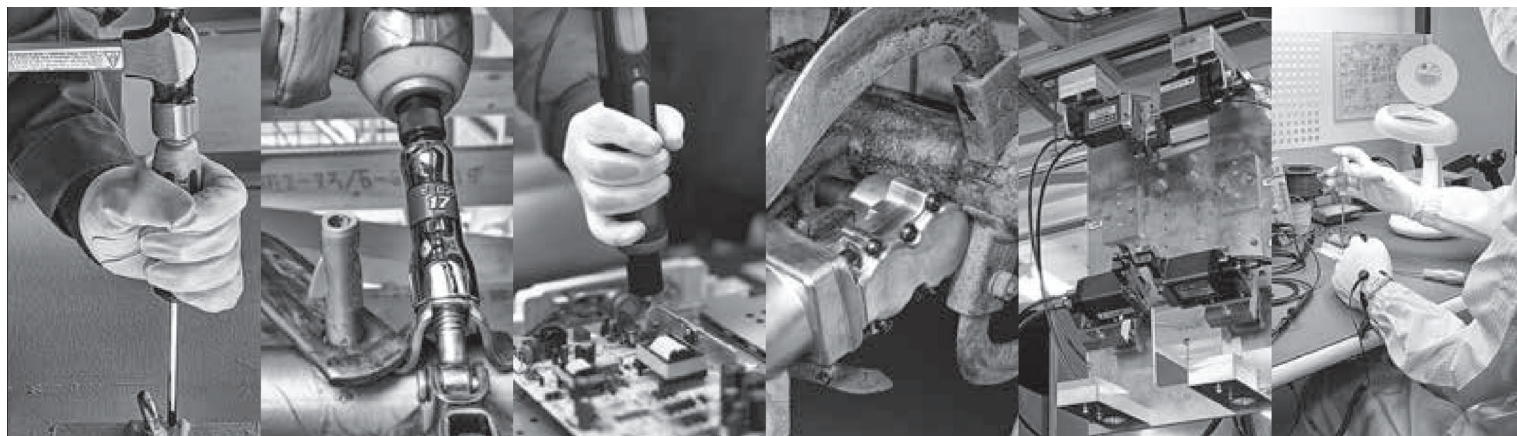

Designed and Produced by:

Trident Tools Sdn Bhd 202401039705 (1585552-K)
Wisma Sumber Lot 558, Jalan Subang 3, Off,
Persiaran Subang, Sungai Penaga Industrial Park,
47610 Subang Jaya, Selangor
Tel: +603-56241833

Distributed by:

Trident Tools Sdn Bhd 202401039705 (1585552-K)
Wisma Sumber Lot 558, Jalan Subang 3, Off,
Persiaran Subang, Sungai Penaga Industrial Park,
47610 Subang Jaya, Selangor
Tel: +603-56241833

Dealer's Chop

* Prices are subject to change without prior notice.



Hotline
03-5624 1833

Mon-Fri,
8:30 AM–5:30 PM